




ARCHITECTURAL SHINGLE LINES

Roofing Shingles Built to Do More... & Less

PERFORMANCE ENGINEERED | SUSTAINABLY DESIGNED

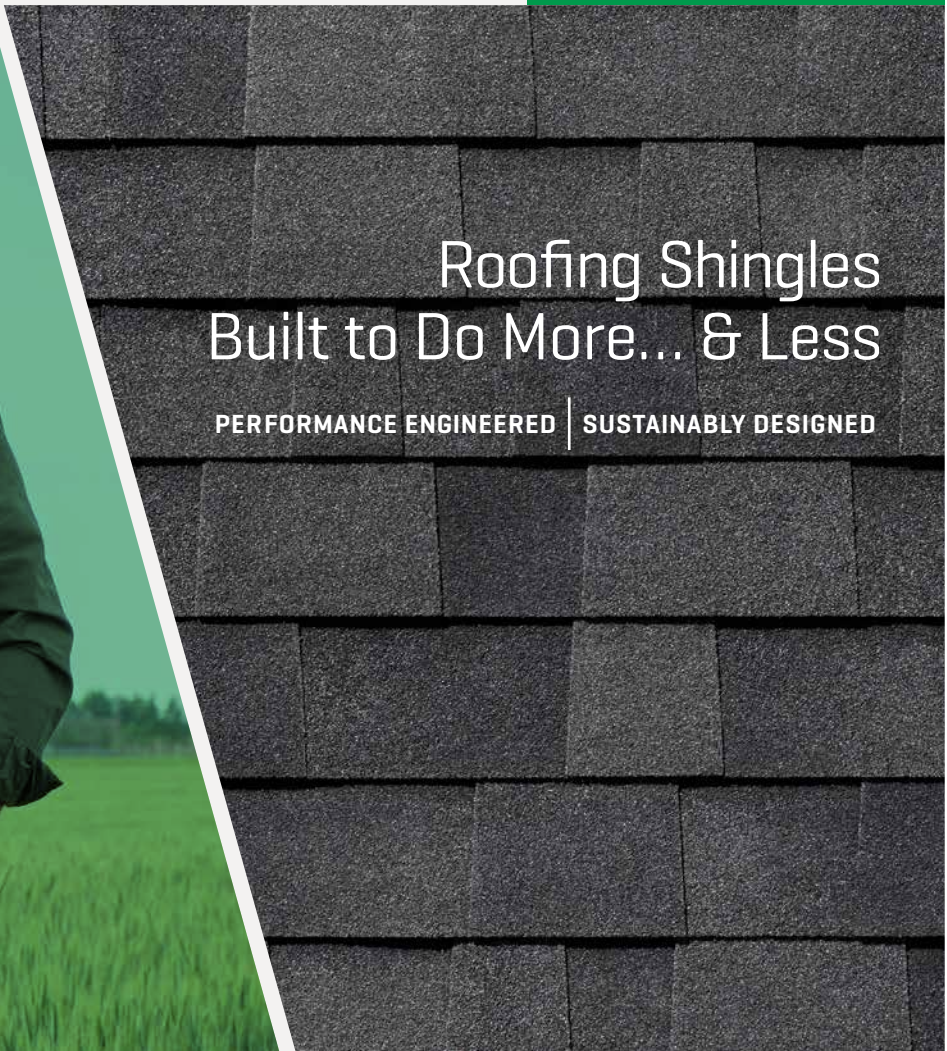

“We strive simply to make the highest-performing shingles in the most sustainable way.” — Dale Rushing, President



Sustainable Performance™

WHY A MALARKEY SHINGLE?

Unlike standard roofing shingles, Malarkey shingles are made with our patented **NEX® Rubberized Asphalt** for superior all-weather durability, **Upcycled Rubber and Plastic** to help reduce landfill waste, and **Smog-Reducing Granules** that help clean the air.

Superior performance **and** better for the environment - why not a Malarkey shingle?

Made Better

Up to **2X** Larger Nailing Area
Up to **50%** More Adhesive Bonds
2X Rain Seals

Lasts Longer

Up to **35%** Greater Tear Strength
Up to **65%** Greater Granule Adhesion
Up to **Class 4 Impact Rating** (highest rating possible)

More Sustainable

Upcycles **~5 Rubber Tires**
Upcycles **~3,200 Plastic Bags**
Cleans Smog Pollution like **~2 Trees**


**per roof*



Foremost, a shingle must perform and last.

PERFORMANCE ENGINEERED

Rubberized asphalt, upcycled rubber and plastic, larger nailing area, tapered backing shim, double rain seals - **industry-leading innovations that have earned Malarkey its reputation for the most technologically advanced, sustainably designed, performance roofing shingles.**

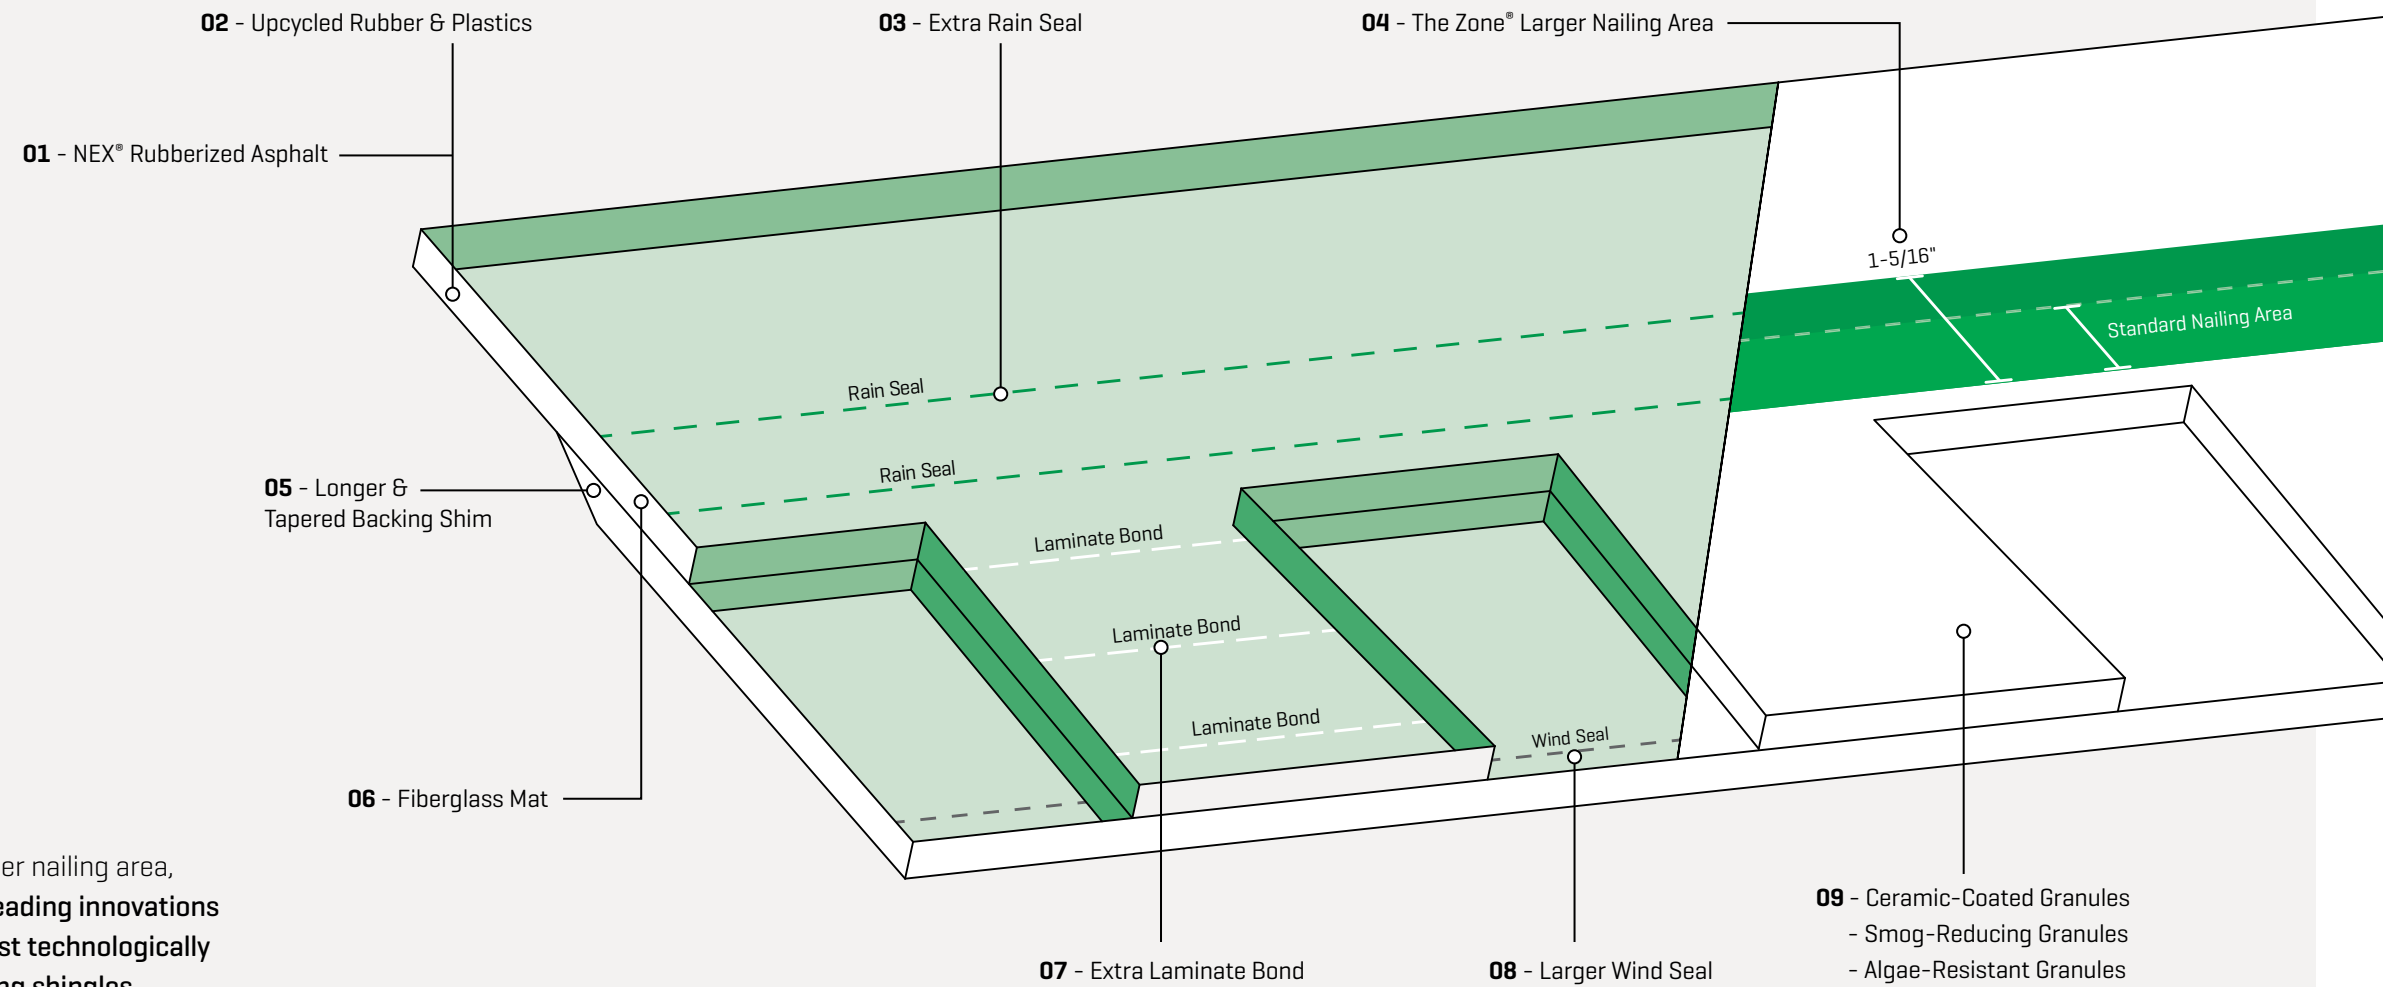

1. 🌿 NEX® Polymer Modified [Rubberized] Asphalt
Asphalt core of shingle is strengthened with SBS rubber polymers for superior all-weather resilience and aging longevity. **Up to Class 4 hail impact rating [highest rating possible]. Insurance discounts often apply.**

2. 🌿 Upcycled Rubber & Plastic
Polymers from recycled rubber and plastic improve shingle durability and aging resistance, while helping reduce landfill waste. **Each average-sized roof [30 squares] upcycles the equivalent of ~5 tires and ~3,200 plastic bags.¹**

3. 🌿 Extra Rain Seal
2X the rain seals of standard shingles, rubberized with SEBS rubber polymers to improve adhesion, resist dry-out, and provide extra leak protection from wind-blown rain.

4. 🌿 The Zone® Larger Nailing Area
Up to 2X larger nailing area creates a bigger nailing target, improving installation speed and accuracy.

5. 🌿 Longer & Tapered Backing Shim
Longer backing shim helps ensure nails **secure BOTH shingle layers**, (top and bottom) critical to preventing blow-offs. Tapered backing shim helps shingles lay flatter to better shed water and help prevent rain from blowing under the shingle and pooling (troughing), waiting to leak down a misplaced nail.

6. 🌿 Fiberglass Mat
Provides structural reinforcement and, combined with NEX® Rubberized Asphalt, from **10-35% greater tear strength** than the industry standard [ASTM D3462].

7. Extra Laminate Bond
Up to 50% more laminate bonds than standard shingles, rubberized with SEBS rubber polymers to improve adhesion, resist dry-out, and protect against shingle delamination.

8. Larger Wind Seal
Larger wind seal, rubberized with SEBS rubber polymers to improve seal-down adhesion and resist dry-out, helps prevent wind from lifting the shingle up and off the roof. **Wind warranties up to 130 mph [209 kph].**

9. Ceramic-Coated Granules
3M™ Roofing Granules add color vibrancy and protect the shingle from hail impact and UV aging, while NEX® Rubberized Asphalt delivers **up to 65% greater granule adhesion** than the industry standard [ASTM D3462].

🌿 Smog-Reducing Granules
Blend of photocatalytic 3M™ Smog-Reducing Granules harness sunlight to actively clean the air of smog emission pollutants like nitrogen dioxide [NO₂]. **Each average-sized roof [30 squares] has the smog-fighting potential of ~2 trees.²**

Algae-Resistant Granules
Blend of algae-resistant 3M™ Copper Granules helps prevent black streaks caused by algae growth. **Up to Limited Lifetime Algae Warranty.**

“70% of homeowners plan to choose eco-friendly materials for their next home renovation.”

- 3M Homeowner Survey



MALARKEY ECO-OFFSET PER ROOF (assumes 30 squares of Vista® shingles)

- 5 Rubber Tires Diverted from the Landfill
- 3.2K Plastic Bags Diverted from the Landfill
- 2 Trees 'Planted' to Help Clean the Air



Environmental stewardship and conservation.

SUSTAINABLY DESIGNED

We all share the same roof over the same home. Malarkey is committed to circular roofing – less waste and pollution, longer lasting products and materials, and the preservation of nature.

Product Longevity

Made with rubberized asphalt for greater strength, durability, granule adhesion, and impact resistance, **Malarkey shingles last longer – the very definition of sustainable.**

Cleaner Technology

Rubberized asphalt is a cleaner technology resulting in much fewer emissions than the oxidized asphalt process used to make standard shingles.

Waste Diversion

All Malarkey shingle manufacturing facilities are **GreenCircle Certified for Waste Diversion from Landfill.**

Global Warming

In the Environmental Product Declaration (EPD) compiled by the Asphalt Roofing Manufacturer's Association (ARMA), **Malarkey shingles are shown to have up to 26% less embodied carbon than standard shingles**, greatly reducing their global warming potential.

Upcycled Content

Recycled content can sometimes diminish product quality. Malarkey upcycles rubber and plastic that improve product performance. Malarkey shingles are **GreenCircle Certified for Recycled Content.**

Smog-Reducing Granules

Clean air is a concern of us all, which is why we integrate smog-reducing granules. **These innovative granules harness sunlight to help clean the air of smog emission pollutants.**



“One of the amazing parts of working with Malarkey is that **they upcycle materials to reduce the impact on our environment** with their products!”

– Anytime Roofing, Inc.
Seattle



SHOWN IN MIDNIGHT BLACK

Asphalt weathering, rubber tough, environmentally conscious.

RUBBERIZED ASPHALT [& ADHESIVE] TECHNOLOGY

Malarkey pioneered polymer modified (rubberized) asphalt roofing shingles, a superior, sustainable, and cleaner [fewer emissions] technology that sets the standard for modern shingle-making.

Standard Shingle Technology [Oxidized Asphalt]

Standard roofing shingles are made of oxidized asphalt, an old technology that uses oxygen and extreme heat to dry-out and harden asphalt for use in shingles.

The problem is that oxidation dries-out the asphalt too much. Like over-baking a cookie, oxidized asphalt becomes hard and brittle – more prone to breaking and cracking; and like dried-out glue, loses its extreme stickiness, resulting in premature granule loss.

Malarkey Shingle Technology [Rubberized Asphalt]

Malarkey invented *rubberized asphalt* roofing shingles. Our patented NEX® Polymer Modified [Rubberized] Asphalt formulation uses SBS virgin rubber polymers, and upcycled rubber and plastic polymers, to strengthen the asphalt core of the shingle for stronger, longer, all-weather durability.

Rubberization enhances asphalt's suppleness to resist thermal dry-out [aging longevity] and stickiness to better adhere and embed granules [granule retention], while adding rubberlike flex to resist tears and breaks and shock dispersion to better absorb and deflect force impact without damage [impact resistance].

Rubberized Adhesive

We also rubberize the adhesive used throughout the shingle [wind seal, rain seals, laminate bonds] with SEBS rubber polymers for **stronger seal-down action and greater resistance to thermal dry-out.**

Upcycled Sustainability

In addition to virgin polymers, we also incorporate *upcycled* rubber and plastic polymers. **These recycled polymers improve shingle strength and durability,** while also benefiting the shingle with an anti-UV aging ingredient inherent in tires. **Recycled ingredients extending product life and landfill life. A true win-win!**

MALARKEY'S PATENTED NEX® RUBBERIZED ASPHALT FORMULA



High-Grade Asphalt
Waterproofing & Granule Adhesion



Synthetic Rubber Polymers (SBS)
Strength, Flexibility, Aging



Upcycled Rubber Polymers
Durability, Aging, Sustainability



Upcycled Plastic Polymers
Strength & Sustainability

“The addition of rubber polymers to asphalt shingles was an absolute game-changer!”

Not only does this allow Malarkey to recycle rubber tires, it also makes the shingle more resilient to hail due to the shock dispersion of rubber.”

– Marshall Anliker, Assurance Exteriors, Kansas



It takes over 6,000 nails to properly secure a roof. Even one out of place can cause a leak or void a wind warranty.

It's why we invented **The Zone[®]** larger nailing area – *the industry's first.*

Installation accuracy is as important as the shingle itself.


LARGER NAILING AREA

Malarkey invented the larger nailing area, called **The Zone[®]**, which consists of 4 key components:

1.) **Wider nailing lines** on the top of the shingle create a bigger nailing target to improve installation speed and accuracy, 2.) **Longer backing shim** helps ensure nails also secure the bottom shingle layer – critical to preventing shingle uplift and blow-offs, 3.) **Tapered backing shim** helps shingles lay flatter to better shed water and help prevent rain from blowing under the shingle and pooling (troughing), waiting to leak down a misplaced nail, and 4.) **Extra rain seal** helps keep out wind-blown rain.


Malarkey Shingle - Nailing Area

Top view, partial section of shingle:

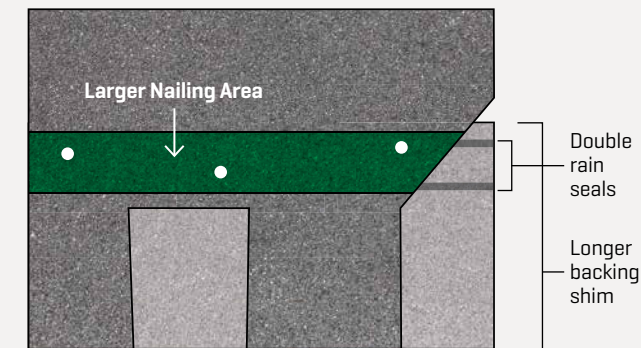


Wider nailing lines create a bigger nailing target, while a longer backing shim, helps ensure nails also secure the bottom shingle layer – critical to helping prevent uplift and blow-offs.

Side view of shingle laying flat:

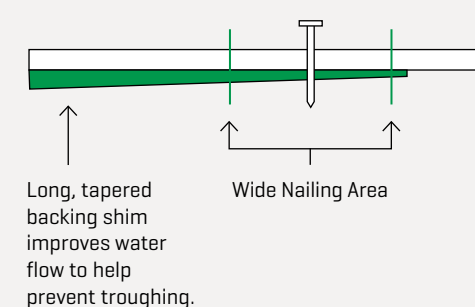


Competitor Shingles - Nailing Area

Top view, partial section of shingle:

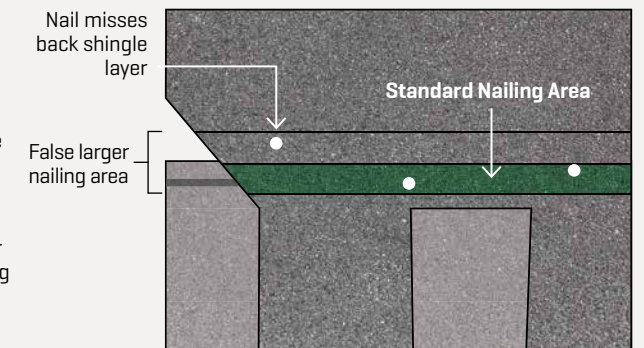

Competitor shingles can have a smaller nailing area that's hard to hit, or a 'false' larger nailing area with wider nailing lines on the top of the shingle, but a short backing shim, so even nails that hit *within* the wider nailing lines can still fail to secure the short, bottom [back] shingle layer.

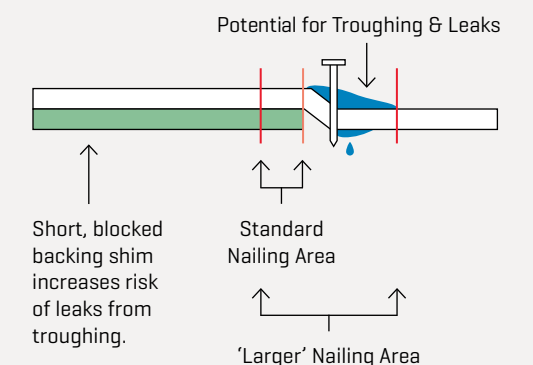



“My husband and I were so thankful we had your shingles installed.

We truly feel having those shingles on our roof saved us from additional damage if the shingles were to have been ripped off, as all our neighbors’ houses lost their shingles.”

– Tina Stewart, Homeowner
Lake Park, Iowa



SHOWN IN NATURAL WOOD

“We love our Malarkey shingles - 3 hail storms and 90 plus mile an hour winds & nothing wrong with our roof.

You’ve got to love them.”

- Timothy Gilbert, Homeowner, Carbondale, Kansas



Rubberized to resist hail damage.

IMPACT RESISTANCE [& GRANULE ADHESION]

Hail is hard on shingles. When it hits, it dents and tears and dislodges granules, elevating the risk of leaks. **Malarkey’s rubberized asphalt formulation adds rubberlike durability to resist tears and breaks, as well as shock dispersion to better absorb and deflect hail impact without damage. All Malarkey shingles are Class 3 or 4 impact rated [highest ratings possible].**

Granule Adhesion

Granules protect the shingle from UV aging and hail impact. The longer they stay on the shingle, the longer it lasts. Asphalt is the glue that holds them in place.


As temperatures change, the asphalt in shingles moves - expands in heat, contracts in cold - constantly gripping and regripping granules. **Malarkey’s rubberized asphalt formulation enhances asphalt’s suppleness and stickiness for deeper granule embedment and adhesion, with rubberlike elongation and recovery to more effectively grip and regrip granules for longer, helping reduce granule loss. Malarkey shingles have up to 65% greater granule adhesion than the industry standard specification [ASTM D3462].**

IMPACT RATING METHODOLOGY

Shingles are classified for impact resistance. Class 3 and 4 rated shingles can withstand a 1.75" and 2.0" steel ball dropped on the shingles 12 times from 17 and 20 feet, respectively, with neither the exposed nor back surface of the shingle showing signs of fracturing.

Standard Shingle

Standard shingles are brittle, more likely to fracture and lose granules from hail impact.

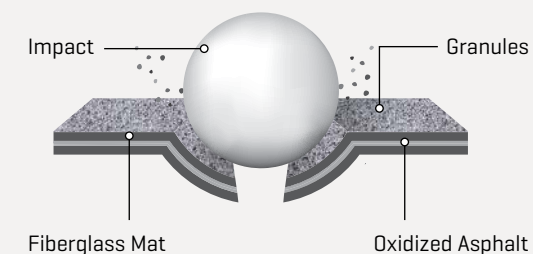


IMPACT PERFORMANCE

Malarkey’s entire shingle line is Class 3 or Class 4 impact rated [highest ratings possible]. Malarkey also consistently ranks at the top of the Institute for Business and Home Safety’s *Hail Impact Study* and meets their stringent FORTIFIED™ Roof requirements. *Insurance discounts often apply.*

Malarkey Shingle

Malarkey shingles are rubberized to better absorb and deflect hail impact.

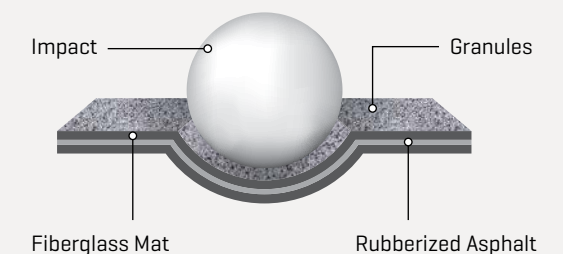



One Roof at a Time

“Granted, it’s just one roof, but if everyone starts choosing a shingle that reduces landfill waste and also fights air pollution, who knows what the end result will be.”

– James Martinez, Homeowner

There’s more than one way to plant a tree.

SMOG-REDUCING GRANULES

Smog is a form of air pollution resulting from the interaction of UV sunlight with chemicals in the atmosphere like nitrogen dioxide (NO₂) that get into the air primarily from the burning of fuel [ex. vehicle emissions].



Improving Our Climate

3M™ Smog-Reducing Granules

All Malarkey shingles include 3M™ Smog-Reducing Granules. Designed with a photocatalytic coating, and blending inconspicuously into the shingle’s color, these innovative granules harness sunlight to actively clean the air of emission pollutants. **Each average-sized roof of Malarkey shingles (30 squares) has the smog-fighting potential equivalent to ~2 trees.²**

HOW IT WORKS

Sunlight activates the smog-reducing granule with enough energy to break apart water molecules in the air, like from humidity (H₂O breaks into OH and H). The newly formed OH molecule seeks to attach itself to smog molecules (NO₂) that come close to the roof.

When the OH molecule attaches to the NO₂ smog molecule, it chemically transforms NO₂ [smog gas] into NO₃ [a salt solid] which drops to the roof and rinses away as plant food.



Why Not Just Clean the Roof?

Climbing on the roof and attempting to remove black streaks caused by algae growth via pressure washing is dangerous and can damage your roof by dislodging the shingle’s protective granules, their primary defense against damage and UV aging.



Prevent black streaks caused by algae growth.

ALGAE-RESISTANT GRANULES

Humidity and sunlight create the perfect environment for algae growth. On a roof, this growth can manifest as black streaks that diminish your roof’s appearance.

3M™ COPPER GRANULES (ALGAE)

To help combat algae growth, we utilize 3M™ Copper Granules. Designed with a special copper coating, and blending inconspicuously into the shingle’s color, these innovative granules, on our AR [algae resistant] designated shingles, release copper ions which inhibit algae growth, helping prevent it from getting started in the first place.

MAXIMUM ALGAE PROTECTION

For maximum algae protection, shingles featuring Scotchgard™ Protector utilize at least a 10% blend of 3M™ Copper Granules.

Malarkey was the first shingle manufacturer to receive the Scotchgard™ Protector designation.





YMCA COMPLEX, ESTES PARK, CO - SHOWN IN ANTIQUE BROWN

“Turning old tires into beautiful roofs that are also hail resistant! We love teaming up with companies like Malarkey who are on the leading edge of technology!”

- Misty Krebs, Valcore Roofing Colorado





Black Oak [H, V, L]



Midnight Black [H, V, L]



Storm Grey [H, V, L]

COLOR OPTIONS

Malarkey offers a full palette of shingle colors. To see more examples of finished roofs, visit www.malarkeyroofing.com/homeowners/gallery.

COLORS AVAILABLE BY SHINGLE LINE

- [H] Highlander® AR
- [V] Vista® AR
- [L] Legacy® Scotchgard™ Protector

Prior to making your color selections, please ask to see an actual shingle for the most accurate depiction of shingle, color, and thickness. *It is recommended to view five or six shingles.*

Matching colors are available in high-profile EZ-Ridge® XT as well as standard low-profile RidgeFlex® hip and ridge shingles.

Distributed from Portland, Oregon



Antique Brown [H, V, L]



Heather [H, V, L]



Natural Wood [H, V, L]



Weathered Wood [H, V, L]



Sienna Blend [H, V, L]



Silverwood [H, V, L]





Roof Designer

To help you visualize your new roof, try our Roof Designer at www.malarkeyroofing.com/roof-designer.

COLOR OPTIONS

- Antique Brown
- Black Oak
- Heather
- Natural Wood
- Midnight Black
- Sienna Blend
- Silverwood
- Storm Grey
- Weathered Wood



Industry-leading performance, industry-only sustainability.

BEST IN CLASS

Malarkey shingles are each *Best In Class* in their respective product categories. The only complete shingle line [Good-Better-Best] made with the industry's leading technology (NEX® Rubberized Asphalt), highest impact ratings (Class 3 and Class 4), strongest sustainability (aging longevity, upcycled rubber & plastic, smog-reducing granules), and superior warranty protection for peace of mind.

Architectural Shingle Lines Comparison Chart	VERY GOOD Highlander® AR	BETTER Vista® AR	BEST Legacy® Scotchgard™ Protector
Rubberized Asphalt Technology	NEX®	NEX®	NEX®
Impact Rating [Class 4 highest]	Class 3	Class 4	Class 4
Fire Rating [Class A highest]	Class A	Class A	Class A
Tear Strength*	+10%	+25%	+35%
Granule Adhesion*	+65%	+65%	+65%
Thickness		+10%	+19%
Sustainability (assumes roof of 30 squares)			
~Upcycled Tires	4	5	6
~Upcycled Plastic Bags	2,900	3,200	4,000
~'Planted' Trees ²	2	2	2
Warranties*:			
Shingle Warranty	Limited Lifetime	Limited Lifetime	Limited Lifetime
Non-Prorated Period (years)	10	15	20
Algae Warranty (years)	10	15	Limited Lifetime**
Standard Wind Warranty (mph / kph / years)	110 / 177 / 15	110 / 177 / 15	110 / 177 / 15
Enhanced Wind Warranty (mph / kph / years)	130 / 209 / 15	130 / 209 / 15	130 / 209 / 15

*Versus standard shingles, as measured per ASTM D3462. **Included on shingles with Scotchgard™ Protector from 3M.



MEETS CSA A123.5 STANDARDS



¹ Assumes roof of 30 squares using Vista® shingles.

² Approximation assuming standard roof of 30 squares. Source: Lawrence Berkeley National Laboratory and 3M.

TEST COMPLIANCE: All Shingles - ASTM D7158 Class H, ASTM D3462, ASTM D3161 Class F, ASTM D3018 Type I, ASTM E108 Class A Fire Rating, CSA A123.5, ICC Approval - ESR-3150, and ICC-ES AC438. UL 2218 Class 4 (Legacy® and Vista® lines) and UL 2218 Class 3 (Highlander® line).

DISCLAIMER: Photographs of shingles may not accurately represent their true color or the variations of color blends that will appear on the roof. **Before installation, five or six shingles should be laid out and reviewed for desired color.** Colors and specifications subject to change without notice. Shingle colors not available in all regions or product lines. Scotchgard and Scotchgard Protector, including the 3M logo, are all trademarks of 3M.

+ For complete information on all warranties, including 'Your Choice' Warranty and the Right Start™ non-prorated period against manufacturing defects, please reference **Malarkey's Shingle and Accessory Warranty available at www.malarkeyroofing.com/warranties**.

This version supersedes all previous versions. Rev. 03/24

Thank you for considering a Malarkey shingle to protect your home & help preserve our environment.

Pioneering a Better Way for Over 65 Years

Started as a family business in Oregon in 1956, and now part of the Holcim family of companies, Malarkey Roofing Products® is the industry leader in sustainable, high-performance, roofing shingles, and pioneer of modern shingle-making.

- First Polymer Modified [SBS Rubberized] Asphalt Roofing Shingles
- First Upcycled Rubber in Roofing Shingles
- First Upcycled Plastic in Roofing Shingles
- First Larger Nailing Area
- First Tapered Backing Shim
- First Double Rain Seals
- First 3M Scotchgard™ Protector Algae Designation
- First Smog-Reducing Shingle

*A little more thought, a little more effort, a little more care;
if there's a better, more sustainable way to make a roofing shingle,
we intend to find it.*



WHEN IT MATTERS®
www.malarkeyroofing.com