



FLASHING SHINGLE-TO-SHINGLE TRANSITIONS, GAMBREL ROOF - SECTION VIEW

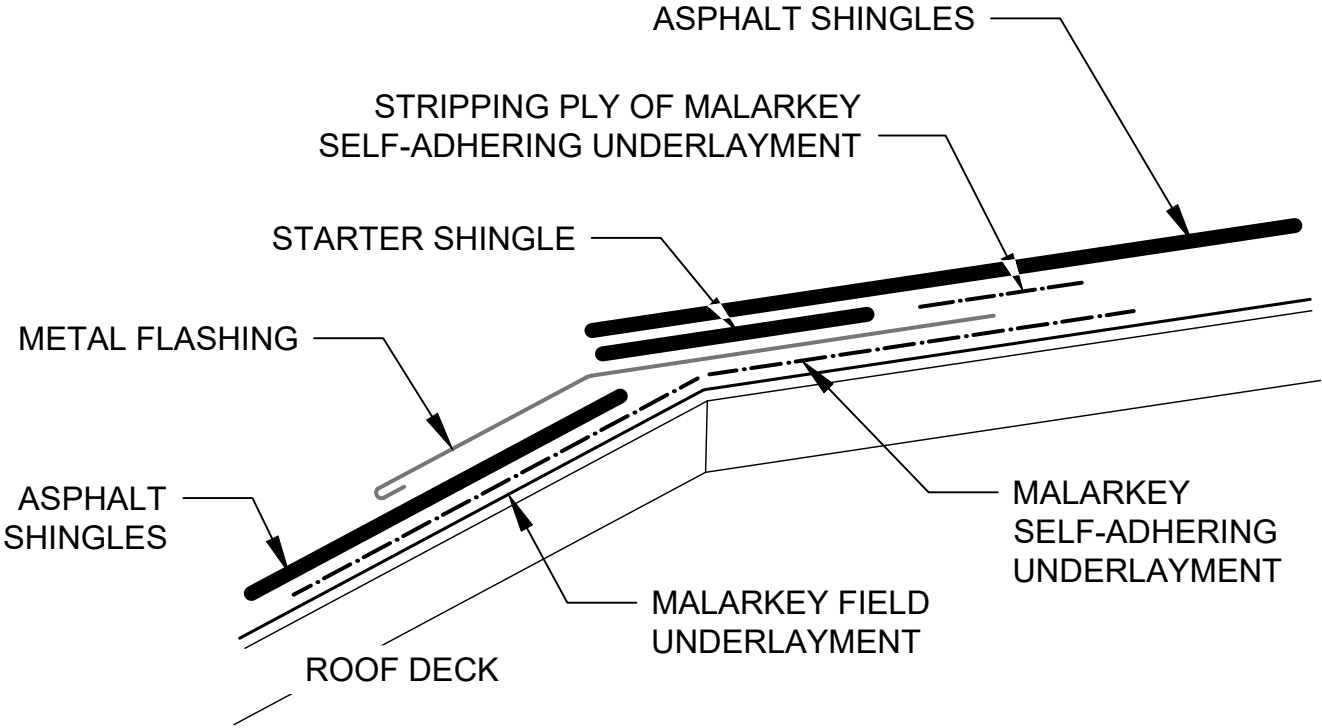

NOTES:

- OVER TRANSITION CHANGE, INSTALL MINIMUM HALF-WIDTH, MALARKEY SELF-ADHERING UNDERLAYMENT; CENTER OVER TRANSITION BREAK.
- SHINGLE UP TO THE TRANSITION BREAK.
- INSTALL 26 GA. CORROSION-RESISTANT METAL FLASHING (HEMMED EDGE ON DOWN-SLOPE SIDE IS OPTIONAL):
 - LAP LOWER FLANGE *OVER* SHINGLES ON THE DOWN-SLOPE SIDE; SECURE WITH GASKETED FASTENERS; SEAL JOINTS WITH A BEAD OF SEALANT.
 - NAIL UPPER FLANGE TO THE DECK ON THE UP-SLOPE SIDE.
 - STRIP-OFF UPPER FLANGE WITH MINIMUM 6"-WIDE (152 MM) MALARKEY SELF-ADHERING UNDERLAYMENT TO COVER FASTENERS: 3" (76 MM) ON THE FLANGE, 3" (76 MM) ON THE FIELD.
- RESUME SHINGLING UP THE ROOF *OVER* THE UPPER FLANGE OF THE FLASHING; AS YOU WOULD AT THE EAVE, BEGINNING WITH A STARTER SHINGLE.

STEEP SLOPE 31B - SEC

	PROJECT NAME:	DATE:
		SCALE: NOT TO SCALE
	ADDRESS:	PROJECT NO:
		DRAWING NO. :
OWNER:		SUBMITTAL NO. :