



Secure Start® Lite

Lightweight Synthetic Underlayment

Designed and constructed with four unique layers, Secure Start® Lite is a synthetic, water resistant membrane applied to the wood decking of the entire roof as an extra layer of water penetration protection and backup to your shingles, wood shakes, metal, slate, or mechanically-fastened roof tiles.

Secure Start® Lite is our **most economical synthetic underlayment.**


4 LAYER CONSTRUCTION

With polypropylene woven core provides **greater tear strength** than conventional felt underlayments. Lays flat, straight & wrinkle-free.

**LIGHTWEIGHT
10 SQ. ROLL**
Only 24 lbs.

IMPROVED SAFETY

Non-woven surface layer provides a slip resistant walking surface and makes steep slope roofing installations safer in all weather conditions.

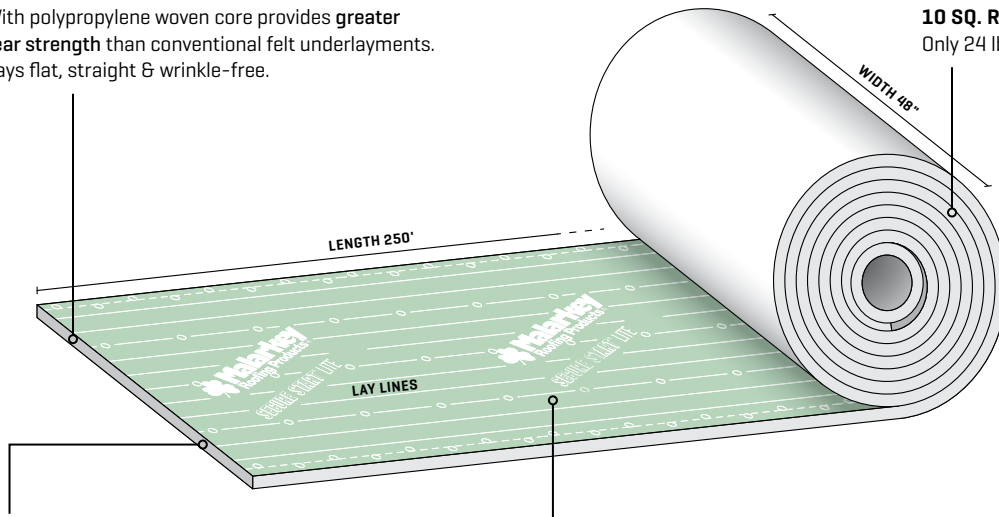


ANTI-SLIP COATING

Polyolefin coating on the bottom layer offers safe, steep slope traction.

100% WATER & AIR RESISTANT

Polypropylene top layer **effectively sheds water** and can withstand 90 days of UV exposure.



Secure Start® Lite is mechanically fastened to the roof deck, and carries a **UL Class A Fire Rating** when installed with a fire-rated roof covering.

Test Compliance – ASTM D226, ASTM D4869, ASTM D8257, ASTM E108 Class A Fire Rating, CAN/CSA A220.1, CCRR #0537, ICC-ES AC188, and FBC FL23186.

Secure Start® Lite is eligible for expanded warranty coverages relative to its use as a single roofing accessory or in combination with others in a complete Malarkey Secure Choice™ roofing system (Standard Shingle & Accessory Warranty) and as part of Emerald Pro Warranty installations. Installed separately, it carries a 10-year product warranty against manufacturing defects.

For complete warranty information, please visit www.malarkeyroofing.com/warranties.

This version supersedes all previous versions. Rev. 07/24

www.malarkeyroofing.com
800-545-1191

MEETS CSA A220.1
STANDARDS 