




SECURE START® SG



Secure Start® SG

Smooth Grade, Lightweight Synthetic Underlayment

Secure Start® SG is a water-resistant, smooth grade synthetic membrane engineered with four unique layers for durability. Applied to the wood decking of the entire roof, the underlayment acts as an extra layer of water penetration protection and backup to your shingles, wood shakes/shingles, metal, and mechanically-fastened roof tiles.

Secure Start® SG is our synthetic underlayment for **smooth grade and/quick-lay application**.


4 LAYER CONSTRUCTION

With polyolefin woven core provides **greater tear strength** than conventional felt underlayments. Lays flat, straight & wrinkle-free.

**LIGHTWEIGHT
10 SQ. ROLL**
Only 22 lbs.

SMOOTH GRADE SPEED

Smooth surfaces on top and bottom layers lessen shingle drag. Shingles glide across the underlayment, speeding installation.

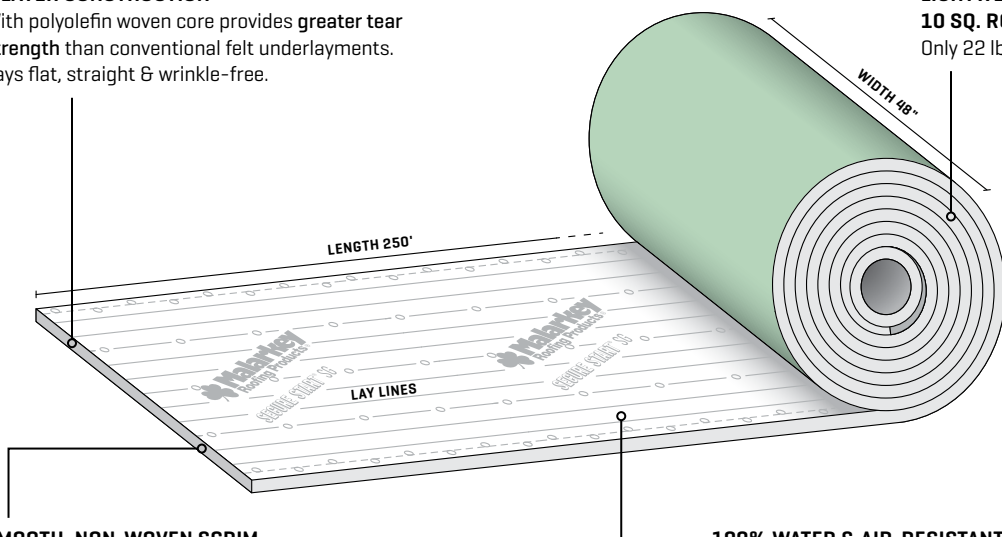


SMOOTH, NON-WOVEN SCRIM

Polymer-coated bottom polyolefin layer speeds underlayment installation.

100% WATER & AIR-RESISTANT

Top layer effectively sheds water and can withstand 90 days of UV exposure.

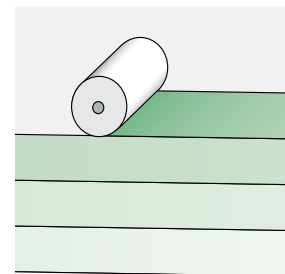

Secure Start® SG is mechanically fastened to the roof deck, and carries a **UL Class A Fire Rating** when installed with a fire-rated roof covering.

Test Compliance – ASTM D226 Types I & II, ASTM D4869 Types II & IV, ASTM D8257, ASTM E108 Class A Fire Rating, CAN/CSA A123.3, CCRR-1082, and FBC FL23186.

Secure Start® SG is eligible for expanded warranty coverages relative to its use as a single roofing accessory or in combination with others in a complete Malarkey Secure Choice™ roofing system. Installed separately, it carries a 10-year product warranty against manufacturing defects. For complete warranty information, please visit www.malarkeyroofing.com/warranties.

This version supersedes all previous versions. Rev. 07/24

www.malarkeyroofing.com
800-545-1191

MEETS CSA A123.3
STANDARDS