Malarkey Roofing Products®











PRODUCT DATA GUIDE


PRODUCTS

STEEP SLOPE PRODUCTS

COLOR AVAILABILITY CHART 1
SHINGLES 2-4
STARTER SHINGLES 4
HIP AND RIDGE SHINGLES 5
UNDERLAYMENTS 6

LOW SLOPE PRODUCTS

COLOR AVAILABILITY CHART 7
FIBERGLASS BUILT-UP ROLL ROOFING
CONVENTIONAL MULTI-PLY SYSTEMS 8
SBS POLYMER MODIFIED SYSTEMS 8
OMNISEAL® SELF-ADHERED SYSTEMS 9
BROADCAST (FINISH) GRANULES 9

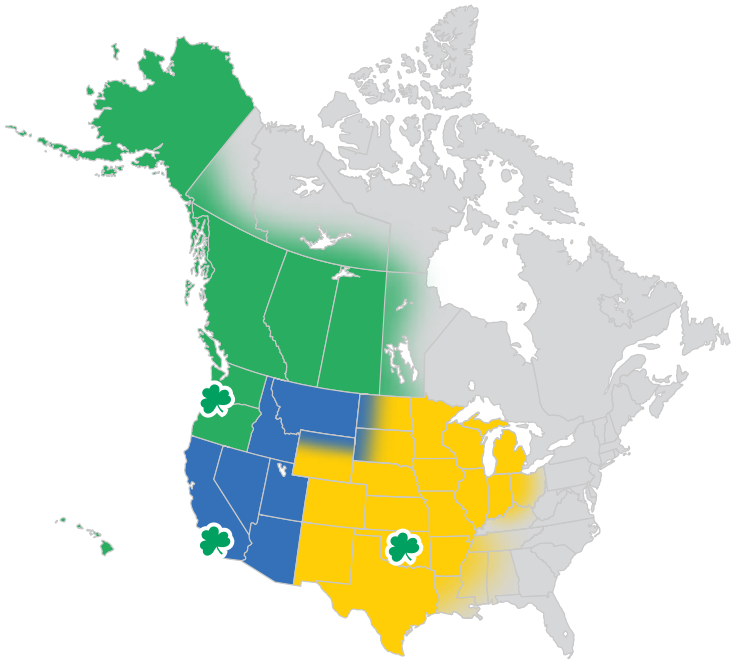

DISTRIBUTION LOCATIONS:

- Portland, OR
- South Gate, CA
- Oklahoma City, OK

* For distribution outside the highlighted areas, please contact Malarkey Customer Service at 1 (800) 545-0182.

STOCK ITEMS AND COLORS

Stock items and colors are normally available from our inventories for regularly scheduled shipments. Lead times may vary based on seasonal demand.

FOR ADDITIONAL INFORMATION

Malarkey Roofing Products®
PO Box 17217
Portland, OR 97217
(503) 283-1191 or (800) 545-1191
Facsimile: (503) 289-7644
Website: WWW.MALARKEYROOFING.COM

This information is effective August 2026 and supersedes all previously published data. Malarkey Roofing Products® reserves the right to change any information contained herein without notice. For the current version of product literature, go to WWW.MALARKEYROOFING.COM.

ORDER DESK AND TECHNICAL CONTACTS:

Customer Service Order Desk
malarkey.customerservice@amrize.com
1 (800) 545-0182 or (503) 283-0182
Facsimile: (503) 283-8069
Hours: 6 am - 5 pm, Pacific Time

Technical Services
1 (800) 545-1191 or (503) 283-1191
Facsimile: (503) 283-5405
Hours: 7 am - 5 pm, Pacific Time

NOTE: This information is subject to change.
For the most up-to-date color availability, contact Customer Service
or go to **WWW.MALARKEYROOFING.COM**.

DISTRIBUTED FROM:
- PORTLAND, OR
- SOUTH GATE, CA
- OKLAHOMA CITY, OK

COLOR AVAILABILITY	LAMINATE SHINGLES	241 Highlander®	242 Highlander® AR	251 Vista®	252 Vista® AR	273 Legacy® Scotchgard™	SOLAR REFLECTIVE SHINGLE	245 Highlander® Cool	255 Vista® Cool	DESIGNER SHINGLES	285 Windsor® Scotchgard™	HIP AND RIDGE SHINGLES	222 8" EZ-Ridge® Scotchgard™	224 10" EZ-Ridge® XT Scotchgard™	225 10" RidgeFlex® Scotchgard™	227 12" RidgeFlex® Scotchgard™
Antique Brown		●	●●	●	●●	●●●					●●		●	●●	●●	●●
Black Oak		●	●●	●	●●	●●●					●●		●	●●	●●	●●
Brilliant Black			●		●	●								●		●
Burlwood								●					●	●		
Golden Amber		●											●	●	●	
Heather		●	●●	●	●●	●●●					●●		●	●●	●●	●●
Ivory Mist		●											●	●	●	
Midnight Black		●	●	●	●	●●					●●		●	●●	●●	●●
Moonlit Black								●	●				●	●		
Natural Wood		●	●●	●	●●	●●●					●●		●	●●	●●	●●
Riverstone Grey								●	●				●	●		
Sienna Blend		●	●●	●	●●	●●●							●	●●	●●	●●
Silverwood		●	●●	●	●●	●●●							●	●●	●●	●●
Storm Grey		●	●●	●	●●	●●●					●●		●	●●	●●	●●
Weathered Wood		●	●	●	●	●●					●●		●	●●	●●	●●
Weathered Wood Plus			●		●	●								●		●
Willow Wood								●	●				●	●		

Scotchgard and the Scotchgard Protector logo, including the 3M logo are all trademarks of 3M.

NEX® Laminated Architectural Shingles

See page 1 for color availabilities and distribution locations.

PRODUCT DESCRIPTION	TESTING & APPROVALS	SPECIFICATIONS

241 Highlander®

- NEX® Polymer Modified Asphalt
- Limited Lifetime Shingle Warranty
- 110 mph (177 kph) Limited Wind Warranty
- 130 mph (209 kph) Enhanced Wind Warranty available
- Class 3 Impact Resistant

CRRC RATED PRODUCT

THE ZONE Featuring The Zone,® Malarkey's Patented Nailing Area

ASTM D7158 Class H
ASTM D3462
ASTM D3161 Class F
ASTM D3018 Type I
UL 2218 Class 3
ICC Approval - ESR-3150
ICC-ES AC438; CSA A123.5
FBC Approval - FL36890
Listed in various fire assemblies

Intertek

Shingles/Sq.: 66
Bundles/Sq.: 3
Exposure: 5⅝" (143 mm)
Squares/Pallet: 16

Highlander® colors *Golden Amber, Ivory Mist, Sienna Blend* and *Silverwood* have measured radiative property values listed with CRRC[1] and can be used to comply with California Energy Code Title 24, Part 6 Cool Roof Requirements. SRI: 21 (Golden Amber); 26 (Ivory Mist); 20 (Sienna Blend); 21 (Silverwood)

242 Highlander® AR

- NEX® Polymer Modified Asphalt
- Limited Lifetime Shingle Warranty
- 110 mph (177 kph) Limited Wind Warranty
- 130 mph (209 kph) Enhanced Wind Warranty available
- 15-Year Algae Resistant System Warranty*
- Class 3 Impact Resistant

THE ZONE Featuring The Zone,® Malarkey's Patented Nailing Area

ASTM D7158 Class H
ASTM D3462
ASTM D3161 Class F
ASTM D3018 Type I
UL 2218 Class 3
ICC Approval - ESR-3150
ICC-ES AC438
CSA A123.5
FBC Approval - FL36890
Listed in various fire assemblies

Intertek

Shingles/Sq.: 66
Bundles/Sq.: 3
Exposure: 5⅝" (143 mm)
Squares/Pallet: 16

245 Highlander® Cool

- NEX® Polymer Modified Asphalt
- Limited Lifetime Shingle Warranty
- 110 mph (177 kph) Limited Wind Warranty
- 130 mph (209 kph) Enhanced Wind Warranty available
- Class 3 Impact Resistant

CRRC RATED PRODUCT

THE ZONE Featuring The Zone,® Malarkey's Patented Nailing Area

ASTM D7158 Class H
ASTM D3462
ASTM D3161 Class F
ASTM D3018 Type I
UL 2218 Class 3
ICC Approval - ESR-3150
ICC-ES AC438; CSA A123.5
Listed in various fire assemblies

Intertek

Shingles/Sq.: 66
Bundles/Sq.: 3
Exposure: 5⅝" (143 mm)
Squares/Pallet: 16

Highlander® Cool shingles have measured radiative property values listed with CRRC and can be used to comply with California Energy Code Title 24, Part 6 Cool Roof Requirements.

245 Highlander® Cool	*Solar Reflectance*[1]		*Thermal Emittance*[1]		*Solar Reflective Index*[1]	
	Initial	Weathered	Initial	Weathered	Initial	Weathered
Burlwood	0.21	0.21	0.91	0.94	20	22
Moonlit Black	0.20	0.20	0.92	0.92	20	20
Riverstone Grey	0.20	0.20†	0.92	0.92†	20	20†
Willow Wood	0.20	0.20	0.92	0.92	20	20

[1] Results are CRRC listings unless marked otherwise.
† Solar reflectance data calculated using the California Energy Commission SRI Calculation Worksheet.
* Warranty coverage is limited solely to blue-green algae (Gloeocapsa magma). No other algae or biological growths are covered. Malarkey hip and ridge shingles (10", 12" RidgeFlex® or 8", 10" EZ-Ridge® with Scotchgard™ Protector from 3M) are recommended for all Malarkey field shingles but required with Malarkey Algae Resistant (AR) shingles to receive Malarkey's limited algae resistant roof system warranty.

NEX® Laminated Architectural Shingles (cont.)

See page 1 for color availabilities and distribution locations.

PRODUCT DESCRIPTION	TESTING & APPROVALS	SPECIFICATIONS

251 Vista®

- NEX® Polymer Modified Asphalt
- Limited Lifetime Shingle Warranty
- 110 mph (177 kph) Limited Wind Warranty
- 130 mph (209 kph) Enhanced Wind Warranty available
- Class 4 Impact Resistant

CRRC RATED PRODUCT

THE ZONE Featuring The Zone,® Malarkey's Patented Nailing Area

ASTM D7158 Class H
ASTM D3462
ASTM D3161 Class F
ASTM D3018 Type I
UL 2218 Class 4
ICC Approval - ESR-3150
ICC-ES AC438; CSA A123.5
FBC Approval - #14809
Listed in various fire assemblies

Shingles/Sq.: 66
Bundles/Sq.: 3
Exposure: 5⅝" (143 mm)
Squares/Pallet: 16

Vista® colors *Sienna Blend* and *Silverwood* have measured radiative property values listed with CRRC[1] and can be used to comply with California Energy Code Title 24, Part 6 Cool Roof Requirements.
SRI: 20 (Sienna Blend); 20 (Silverwood)

252 Vista® AR

- NEX® Polymer Modified Asphalt
- Limited Lifetime Shingle Warranty
- 110 mph (177 kph) Limited Wind Warranty
- 130 mph (209 kph) Enhanced Wind Warranty available
- 25-Year Algae Resistant System Warranty*
- Class 4 Impact Resistant

THE ZONE Featuring The Zone,® Malarkey's Patented Nailing Area

ASTM D7158 Class H
ASTM D3462
ASTM D3161 Class F
ASTM D3018 Type I
UL 2218 Class 4
ICC Approval - ESR-3150
ICC-ES AC438
CSA A123.5
FBC Approval - #14809
Listed in various fire assemblies

Shingles/Sq.: 66
Bundles/Sq.: 3
Exposure: 5⅝" (143 mm)
Squares/Pallet: 16

255 Vista® Cool

- NEX® Polymer Modified Asphalt
- Limited Lifetime Shingle Warranty
- 110 mph (177 kph) Limited Wind Warranty
- 130 mph (209 kph) Enhanced Wind Warranty available
- Class 4 Impact Resistant

CRRC RATED PRODUCT

THE ZONE Featuring The Zone,® Malarkey's Patented Nailing Area

ASTM D7158 Class H
ASTM D3462
ASTM D3161 Class F
ASTM D3018 Type I
UL 2218 Class 4
ICC Approval - ESR-3150
ICC-ES AC438; CSA A123.5
Listed in various fire assemblies

Shingles/Sq.: 66
Bundles/Sq.: 3
Exposure: 5⅝" (143 mm)
Squares/Pallet: 16

Vista® Cool shingles have measured radiative property values listed with CRRC and can be used to comply with California Energy Code Title 24, Part 6 Cool Roof Requirements.

255 Vista® Cool	*Solar Reflectance*[1] Initial	*Solar Reflectance*[1] Weathered	*Thermal Emittance*[1] Initial	*Thermal Emittance*[1] Weathered	*Solar Reflective Index*[1] Initial	*Solar Reflective Index*[1] Weathered
Moonlit Black	0.20	0.20	0.92	0.92	20	20
Riverstone Grey	0.20	0.20†	0.92	0.92†	20	20†
Willow Wood	0.20	0.20	0.92	0.92	20	20

[1] Results are CRRC listings unless marked otherwise.
† Solar reflectance data calculated using the California Energy Commission SRI Calculation Worksheet.
* Warranty coverage is limited solely to blue-green algae (Gloeocapsa magma). No other algae or biological growths are covered. Malarkey hip and ridge shingles (10", 12" RidgeFlex® or 8", 10" EZ-Ridge® with Scotchgard™ Protector from 3M) are recommended for all Malarkey field shingles but required with Malarkey Algae Resistant (AR) shingles to receive Malarkey's limited algae resistant roof system warranty.

NEX® Laminated Architectural Shingles (cont.)

See page 1 for color availabilities and distribution locations.

PRODUCT DESCRIPTION	TESTING & APPROVALS	SPECIFICATIONS
273 Legacy® Scotchgard • NEX® Polymer Modified Asphalt • Limited Lifetime Shingle Warranty • 110 mph (177 kph) Limited Wind Warranty • 130 mph (209 kph) Enhanced Wind Warranty available • Limited Lifetime Scotchgard™ Protector Warranty* • Class 4 Impact Resistant THE ZONE Featuring The Zone,® Malarkey's Patented Nailing Area	ASTM D7158 Class H ASTM D3462 ASTM D3161 Class F ASTM D3018 Type I UL 2218 Class 4 ICC Approval - ESR-3150 ICC-ES AC438 CSA A123.5 FBC Approval - #14809 Listed in various fire assemblies UL LISTED ETL Intertek	Shingles/Sq.: 64 Bundles/Sq.: 4 Exposure: 5⅝" (143 mm) Squares/Pallet: 12

NEX® Designer Shingles

See page 1 for color availabilities and distribution locations.

PRODUCT DESCRIPTION	TESTING & APPROVALS	SPECIFICATIONS
285 Windsor® Scotchgard • NEX® Polymer Modified Asphalt • Limited Lifetime Shingle Warranty • 110 mph (177 kph) Limited Wind Warranty • 140 mph (225 kph) Enhanced Wind Warranty available • Limited Lifetime Scotchgard™ Protector Warranty* • Class 4 Impact Resistant	ASTM D7158 Class H ASTM D3462 ASTM D3161 Class F ASTM D3018 Type I UL 2218 Class 4 ICC Approval - ESR-3150 ICC-ES AC438 CSA A123.5 FBC Approval - #14809 Listed in various fire assemblies UL LISTED ETL Intertek	Shingles/Sq.: 65 Bundles/Sq.: 5 Exposure: 5¾" (146 mm) Squares/Pallet: 6

Starter Shingles

See page 1 for color availabilities and distribution locations.

PRODUCT DESCRIPTION & TESTING	SPECIFICATIONS	SURFACING/COLOR
210 Smart Start® • Full-width starter shingle separates at perforation to provide two, full-size starter shingles with seal-down • NEX® Polymer Modified Asphalt • Meets requirements of: ASTM D3462; ASTM D3161 Class F; ASTM E108 Class A	Shingles/Bundle: 18 full-size (36 pieces) Linear Ft./Bundle: 114' 9" (35 m) Width: 16⅜" (416 mm) full-size 8³⁄₁₆" (208 mm) per piece Length: 38¼" (972 mm) full-size 38¼" (972 mm) per piece Bundles/Pallet: 21	Mineral surfaced
212 Windsor® Starter Scotchgard • Full-width starter shingle blended to match the Windsor® shingle • NEX® Polymer Modified Asphalt • Limited Lifetime Scotchgard™ Protector Warranty* • Meets requirements of ASTM D3462 and UL 2218 Class 4	Shingles/Bundle: 22 Linear Coverage: 70' (21.3 m) Width: 13¼" (337 mm) Length: 38¼" (972 mm) Bundles/Pallet: 24 ETL Intertek	Shingle Colors match 285 Windsor® (Antique Brown, Black Oak, Midnight Black, Heather, Natural Wood, Storm Grey and Weathered Wood)

*Warranty coverage is limited solely to blue-green algae (Gloeocapsa magma). No other algae or biological growths are covered. Malarkey hip and ridge shingles (10", 12" RidgeFlex® or 8", 10" EZ-Ridge® with Scotchgard™ Protector from 3M) are recommended for all Malarkey field shingles but required with shingles having Scotchgard™ Protector to receive Malarkey's Limited Lifetime Scotchgard™ Protector Warranty.

NEX® Hip and Ridge Shingles

See page 1 for color availabilities and distribution locations.


PRODUCT DESCRIPTION	TESTING & APPROVALS	SPECIFICATIONS
222 EZ-Ridge® Scotchgard • NEX® Polymer Modified Hip and Ridge Shingle with Seal-Down • 8" High-Profile, Decorative • Limited Lifetime Scotchgard™ Protector Warranty* • Class 4 Impact Resistant	ASTM D3161 Class F UL 2218 Class 4 ICC Approval - ESR-3150 FBC Approval - #14809 Listed in various fire assemblies	Shingles/Box.: 30 Ln. Coverage: 20' (6.1 m) Exposure: 8¼" (210 mm) Width: 8" (203 mm) Boxes/Pallet: 42
224 EZ-Ridge® XT Scotchgard • NEX® Polymer Modified Hip and Ridge Shingle with Seal-Down • 10" High-Profile, Decorative • Limited Lifetime Scotchgard™ Protector Warranty* • Class 4 Impact Resistant	ASTM D3161 Class F UL 2218 Class 4 ICC Approval - ESR-3150 FBC Approval - #14809 Listed in various fire assemblies	Shingles/Box.: 30 Ln. Coverage: 20' (6.1 m) Exposure: 8¼" (210 mm) Width: 10" (254 mm) Boxes/Pallet: 42
225 10" RidgeFlex® Scotchgard • NEX® Polymer Modified Hip and Ridge Strips • Limited Lifetime Scotchgard™ Protector Warranty* • Class 4 Impact Resistant	ASTM D7158 Class H; ASTM D3462 ASTM D3161 Class F UL 2218 Class 4; CSA A123.5 ICC Approval - ESR-3150 Listed in various fire assemblies Bundles/Pallet: 48	Units/Bundle: 88 Shingles/Bundle: 22 Ln. Coverage: 41'3" (12.6 m) Exposure: 5⅝" (143 mm) A scored strip is 13¼" (337 mm) tall x 9⅞" (251 mm) wide with seal-down for 5⅝" (143 mm) exposure
227 12" RidgeFlex® Scotchgard • NEX® Polymer Modified Hip and Ridge Strips • Limited Lifetime Scotchgard™ Protector Warranty* • Class 4 Impact Resistant	ASTM D7158 Class H; ASTM D3462 ASTM D3161 Class F UL 2218 Class 4; CSA A123.5 ICC Approval - ESR-3150 Listed in various fire assemblies Bundles/Pallet: 48	Units/Bundle: 66 Shingles/Bundle: 22 Ln. Coverage: 30'11" (9.4 m) Exposure: 5⅝" (143 mm) A scored strip is 13¼" (337 mm) tall x 12" (305 mm) wide with seal-down for 5⅝" (143 mm) exposure

*Warranty coverage is limited solely to blue-green algae (Gloeocapsa magma). No other algae or biological growths are covered. Malarkey hip and ridge shingles (10", 12" RidgeFlex® or 8", 10" EZ-Ridge® with Scotchgard™ Protector from 3M) are recommended for all Malarkey field shingles but required with shingles having Scotchgard™ Protector to receive Malarkey's Limited Lifetime Scotchgard™ Protector Warranty.

Underlayments

See page 1 for color availabilities and distribution locations.

PRODUCT DESCRIPTION & TESTING & APPROVALS	SPECIFICATIONS	SURFACING
Right Start® UDL • NEX® Polymer Modified Fiberglass Underlayment • ASTM D4601 Type II; ASTM D4869; ASTM D226 Type II; ASTM D6757 Type II; ICC Approval - ESR-1561; FBC Approvals - #14807 & #15214; Listed in various fire assemblies	Approx. Wt./Roll: 80 lbs. (36.3 kg) Coverage: 2 square Width: 39⅜" (1 m) Length: 66' (20.1 m) Thickness: 50 mils Rolls/Pallet: 30	Mineral fines
401 Arctic Seal® • Self-Adhering, NEX® Polymer Modified, Steep Slope Underlayment • Ice and Water Protection • ASTM D1970; ASTM E108 Class A • Listed in various fire assemblies • FM Approved	Approx. Wt./Roll: 60 lbs. (27.2 kg) Coverage (approx.): 2 square Width: 36" (0.91 m) Length: 65' (19.8 m) Thickness: 65 mils Rolls/Pallet: 25	Mineral fines, top; asphalt-based adhesive, bottom; release film protects adhesive
406 Secure Start® HT • Self-Adhering, High Temperature Underlayment • Ice and Water Protection • ASTM D1970; ASTM E108 Class A • Class I Impermeable Vapor Retarder • Intertek CCRR-1082; FBC Approval - FL41901	Approx. Wt./Roll: 50 lbs. (23 kg) Coverage (approx.): 2 square Width: 36" (0.91 m) Length: 67' (20.4 m) Thickness: 48 mils Rolls/Pallet: 25	Slip-resistant surface, top; asphalt-based adhesive, bottom; release film protects adhesive
1029 Secure Start® Lite • Lightweight, Synthetic Steep Slope Underlayment • ICC-ES AC188; ASTM D226, D4869 and D8257 • ASTM E108 Class A; Intertek CCRR-0537 • CAN/CSA A220.1; FBC Approval - FL23186	Approx. Wt./Roll: 24 lbs. (10.9 kg) Coverage: 10 square Width: 48" (1.2 m) Length: 250' (76.2 m) Thickness: 7 ±1 mils Rolls/Pallet: 56	Non-woven, anti-skid surface; anti-slip coating on bottom
1031 Secure Start® Plus • Lightweight, Synthetic Steep Slope Underlayment • ASTM D226 Types I & II, D4869 Types II & IV, and D8257 • ASTM E108 Class A; Intertek CCRR-1082 • CAN/CSA A123.3; FBC Approval - FL23186	Approx. Wt./Roll: 32 lbs. (14.5 kg) Coverage: 10 square Width: 48" (1.2 m) Length: 250' (76.2 m) Rolls/Pallet: 36	Raised non-woven, anti-skid surfaces, top and bottom
1040 Secure Start® Permeable • Lightweight, Synthetic Steep Slope Underlayment • ICC-ES AC188; ASTM D8257 and E108 Class A • Meets physical properties of ASTM D4869 • Intertek CCRR-0537; CAN/CSA A220.1; FBC Approval - FL23186	Approx. Wt./Roll: 36 lbs. (16.5 kg) Coverage: 10 square Width: 48" (1.2 m) Length: 250' (76.2 m) Thickness: 32 mils Rolls/Pallet: 20	Raised non-woven, anti-skid surfaces, top and bottom

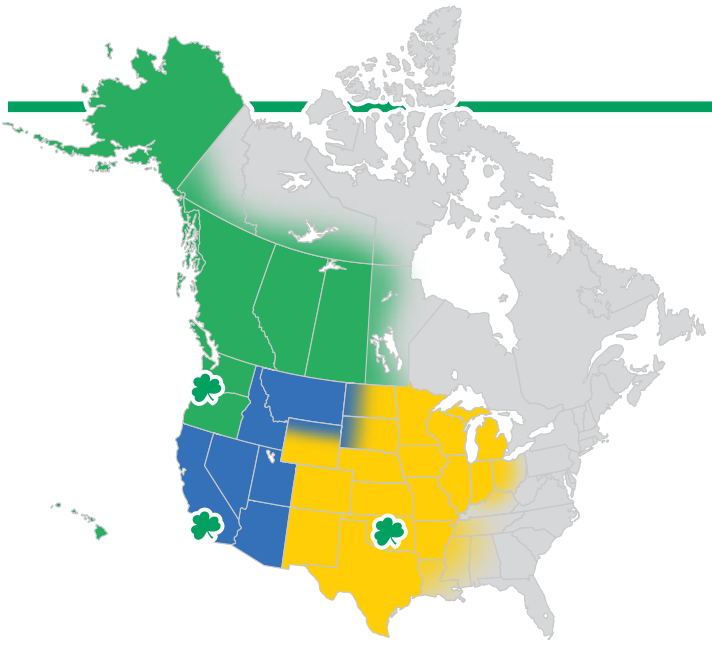

NOTE: This information is subject to change. For the most up-to-date color availability, contact Customer Service or go to **WWW.MALARKEYROOFING.COM**.

DISTRIBUTION LOCATIONS:

- Portland, OR
- South Gate, CA
- Oklahoma City, OK

* For distribution outside the highlighted areas, please contact Malarkey Customer Service at 1 (800) 545-0182.

DISTRIBUTED FROM: ● PORTLAND, OR* ● SOUTH GATE, CA* ● OKLAHOMA CITY, OK* *VARIES BASED ON LOCATION **COLOR AVAILABILITY**	**PANO™ CAP SHEET**	**PARAGON® MODIFIED CAP SHEETS**			**OMNISEAL® MODIFIED CAP SHEETS**
	502 Pano™ Cap	350 Paragon® CHROMA Cap	601 Paragon® MOD Cap	430 OmniSeal® Cap
Antique Brown		●●		●●●
Dove White	●●	●●	●●	●●●
Midnight Black		●●		●●●
Sienna Blend		●●		●●●
Storm Grey		●●		●●●
Tan/Buff				●●●
Weathered Wood		●●		●●●

Base Sheet for Conventional Multi-Ply Systems

PRODUCT DESCRIPTION & TESTING	SPECIFICATIONS	SURFACING
515 Pano™ Base • Fiberglass Reinforced Base Sheet • ASTM D4601 Type II • Listed in various fire assemblies • FM Approved; Intertek CCRR-0333	Approx. Wt./Roll: 75 lbs. (34.2 kg) Coverage: 3 square Width: 39⅜" (1 m) Length: 99' (30.2 m) Rolls/Pallet: 20	Mineral fines

Cap Sheet for Conventional Multi-Ply Systems

PRODUCT DESCRIPTION & TESTING	SPECIFICATIONS	COLORS
502 / 502-S Pano™ Cap • Fiberglass Reinforced Cap Sheets • ASTM D3909; UL 55A Type G3 • Listed in various fire assemblies • FM Approved; Intertek CCRR-0333	Approx. Wt./Roll: 75 lbs. (34 kg) Coverage: 1 square Width: 39⅜" (1 m) Length: 33' (10.1 m) Rolls/Pallet: 30 SKU 502 is fully granulated with a painted 2" (51 mm) lay line. SKU 502-S has a 2" (51 mm) sand selvage.	See Color Chart, Page 8

SBS Polymer Modified Base and Ply Sheets for use in all PMR Systems

PRODUCT DESCRIPTION & TESTING & APPROVALS	SPECIFICATIONS	SURFACING
501 Paragon® MOD Base • SBS Polymer Modified Fiberglass Base Sheet • ASTM D4601 Type II • Listed in various fire assemblies • FM Approved; Intertek CCRR-0333	Approx. Wt./Roll: 92 lbs. (41.7 kg) Coverage: 3 square Width: 39⅜" (1 m) Length: 99' (30.2 m) Rolls/Pallet: 20	Mineral fines, top and bottom

SBS Polymer Modified Cap Sheets for use in all PMR Systems

PRODUCT DESCRIPTION & TESTING	SPECIFICATIONS	COLORS*
350 Paragon® CHROMA Cap • SBS Polymer Modified Granule-Surfaced Fiberglass Cap Sheet • ASTM D3909; ASTM D4869; ASTM D6757 • Listed in various fire assemblies • Intertek CCRR-0333	Approx. Wt./Roll: 78 lbs. (35.4 kg) Coverage: 1 square Width: 39⅜" (1 m) Length: 33' (10.1 m) Rolls/Pallet: 30	See Color Chart, Page 8
601 Paragon® MOD Cap • SBS Polymer Modified Granule-Surfaced Fiberglass Cap Sheet • ASTM D3909 • Listed in various fire assemblies • FM Approved; Intertek CCRR-0333	Approx. Wt./Roll: 100 lbs. (45.4 kg) Coverage: 1 square Width: 39⅜" (1 m) Length: 34' (10.4 m) Rolls/Pallet: 25	See Color Chart, Page 8

*Color availability varies based on location.

OmniSeal® SBS Polymer Modified Self-Adhered Systems

PRODUCT DESCRIPTION & TESTING	SPECIFICATIONS	SURFACING
410 OmniSeal® Base • SBS Polymer Modified Fiberglass Base Sheet • ASTM D4601 Type II; ASTM E108 Class B Fire Rating • Listed in various fire assemblies	Approx. Wt./Roll: 80 lbs. (36.3 kg) Coverage: 2 square Width: 39⅜" (1 m) Length: 66' (20.1 m) Rolls/Pallet: 20	Smooth-surfaced nailable base
420 OmniSeal® Ply • SBS Polymer Modified Self-Adhering Fiberglass Base/Ply Sheet • ASTM D1970; ASTM D4601; ASTM E108 Class B Fire Rating • Listed in various fire assemblies • FM Approved	Approx. Wt./Roll: 80 lbs. (36.3 kg) Coverage: 2 square Width: 39⅜" (1 m) Length: 66' (20.1 m) Rolls/Pallet: 20	Smooth-surfaced self-adhering ply sheet
430 OmniSeal® Cap • SBS Polymer Modified Self-Adhering Fiberglass Cap Sheet • ASTM D3909; ASTM D7530; ASTM E108 Class B Fire Rating; UL 2218A Class 4 Impact Resistant • Listed in various fire assemblies	Approx. Wt./Roll: 78 lbs. (35.4 kg) Coverage: 1 square Width: 39⅜" (1 m) Length: 34' (10.4 m) Rolls/Pallet: 20	Granule-surfaced self-adhering cap sheet See Color Chart, Page 8 (Other colors available upon request*)

Broadcast (Finish) Granules

PRODUCT DESCRIPTION	SPECIFICATIONS	COLOR
2200 Standard Granules • High quality roofing granules for use on asphalt bleed-out at overlap seams between rolls on a low slope roof.	Packaging: 5 gal (18.9 L) containers Approx. Wt.: 50 lbs. (22.7 kg)	Various; contact Customer Service for availability.
2200R Reflective Granules • High quality, solar reflective granules for use on asphalt bleed-out from application of Malarkey reflective cap sheets.	Packaging: 5 gal (18.9 L) containers Approx. Wt.: 50 lbs. (22.7 kg)	Solar White

*Color availability varies based on location.











Malarkey Roofing Products®

P.O. Box 17217
Portland, OR 97217-0217

Rev. 08/26