

# OMNISEAL® SYSTEM



**OmniSeal® is a multi-ply self-adhered system for low slope roofs.**

Designed for 2:12 and lower roof slopes, with colors matched to Malarkey's shingle offerings, OmniSeal® is the perfect solution for the low slope portion of your home or commercial building.

- ▶ Easy to install
- ▶ Polymer modified [rubberized] asphalt
- ▶ 500% thicker than traditional single-ply roofs
- ▶ Enhanced granule adhesion
- ▶ Aggressive roll adhesives
- ▶ Cap sheets feature an adhesive selvage edge for lap joint seams

	<b>410 OMNISEAL® BASE</b> <i>Factory-applied primer on top enhances adhesion</i>	<b>420 OMNISEAL® PLY</b> <i>Factory-applied primer on top enhances adhesion</i>	<b>430 OMNISEAL® CAP</b> <i>Available in multiple colors to match Malarkey shingles</i>	<b>436 OMNISEAL® CAP FR</b> <i>Available in multiple colors to match Malarkey shingles</i>
<b>Application Method</b>	Mechanically Fastened	Self-Adhered	Self-Adhered	Self-Adhered
<b>Asphalt Technology</b>	Polymer Modified Asphalt	Polymer Modified Asphalt	Polymer Modified Asphalt	Polymer Modified Asphalt
<b>Tear Strength</b>	Enhanced	Enhanced	Enhanced	Enhanced
<b>Thickness</b>	50 mils [1.3 mm]	60 mils [1.5 mm]	125 mils [3.2 mm]	125 mils [3.2 mm]
<b>Weight</b>	80 lbs [36.3 kg] per roll	80 lbs [36.3 kg] per roll	78 lbs [35.4 kg] per roll	88 lbs [40 kg] per roll
<b>Size</b>	39% <sup>1</sup> x 66', Net 2 sq. [1 m wide x 20.1 m long]	39% <sup>1</sup> x 66', Net 2 sq. [1 m wide x 20.1 m long]	39% <sup>1</sup> x 34', Net 1 sq. [1 m wide x 10.4 m long]	39% <sup>1</sup> x 34', Net 1 sq. [1 m wide x 10.4 m long]
<b>Testing Compliance</b>	ASTM D4601 Type II; UL & Intertek Listed	ASTM D1970, ASTM D4601, FM Approved, UL & Intertek Listed	ASTM D3909; ASTM D7530; UL 2218 Class 4; Intertek Listed	ASTM D3909; ASTM D7530, ASTM D1970; ASTM D6163 Type I, Grade G; UL 2218 Class 4; Intertek Listed
<b>Warranties+</b>	Up to 20 years	Up to 20 years	Up to 20 years	Up to 20 years
<b>Fire Resistance [FR]</b>	ASTM E108 Class A, B, & C	ASTM E108 Class A, B, & C	ASTM E108 Class B & C	ASTM E108 Class A & B

<sup>1</sup> Malarkey Roofing Products® offers various warranties to meet specific requirements. Visit [www.malarkeyroofing.com/warranties](http://www.malarkeyroofing.com/warranties) for more information.  
Rev. 04/24



# Multiple System Options

Combustible OR


Non-Combustible Decks

Complement any low slope project with OmniSeal® Cap or Cap FR available in a variety of beautiful colors.

Two-Ply System of 410 or 420 and 430 or 436.



The Complete Three-Ply System of 410, 420, and 430 or 436.

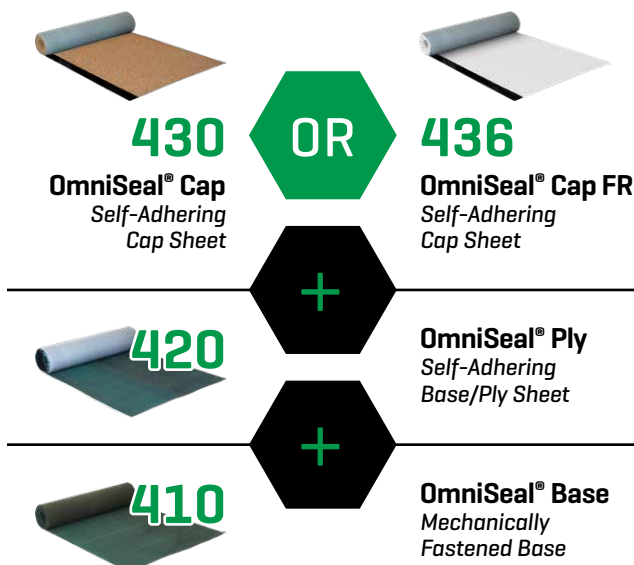

OmniSeal® Roofing Systems using either cap sheet meet UL 2218 Class 4 impact resistant standards.



P.O. Box 17217  
Portland, Oregon 97217  
800.545.1191  
[www.malarkeyroofing.com](http://www.malarkeyroofing.com)