

TECHNICAL DETAILS

FACE HEIGHTS AVAILABLE

5.25", 6.75", 8.25", 9.75",
11.25" and 12.75"

MATERIAL

24 ga. Steel and
.040" Aluminum

TEST COMPLIANCE

ANSI/SPRI/FM
4435/ES-1

FEATURES & BENEFITS

- Twelve-ft. lengths have pre-punched fastening holes to ensure correct fastener placement
- No stripping-in, heat welding, or crimping required
- Wide variety of colors available
- Warranties match applicable NDL terms and conditions
- Tested to comply with the IBC

ENDURA™ EDGE RP

PRODUCT USE

Endura™ Edge RP uses a snap-on cover that eliminates crimping. Dual attachment points on both the face and roof deck allow for added flexibility when accommodating roof irregularities. Endura™ Edge RP has no exposed fasteners or unsightly cover plates to diminish a building's natural aesthetics.

COMPOSITION & MATERIALS

Endura™ Edge RP fascia covers are manufactured of 24 ga. steel and .040" aluminum, coated with Kynar 500® finish, and available in many popular colors. To avoid *oil-canning* on face heights above 8.25", .050" aluminum is also available.


APPLICATION

Installation instructions are available at WWW.MALARKEYROOFING.COM, or by contacting our Technical Services Department.

WARRANTY

Endura™ Edge RP is offered with warranties in varying length and wind speeds that match the terms and conditions offered in the applicable Malarkey Materials and Labor Warranty (NDL). For non-NDL applications this product is warranted against manufacturing defects for a period of ten (10) years. A 30-year Kynar 500® finish warranty is included on coil-coated standard colors. Custom post-coated Kynar 500® colors are available with an included 10-year Kynar 500® finish warranty or a 20-year Kynar 500® finish warranty is available upon request. Contact your roofer, local distribution center, or Malarkey for full details. See below for TECHNICAL ASSISTANCE contact information.

Endura™ Edge RP and other Malarkey products are available throughout North America and Pacific Rim countries. Visit WWW.MALARKEYROOFING.COM for additional product information and availability.

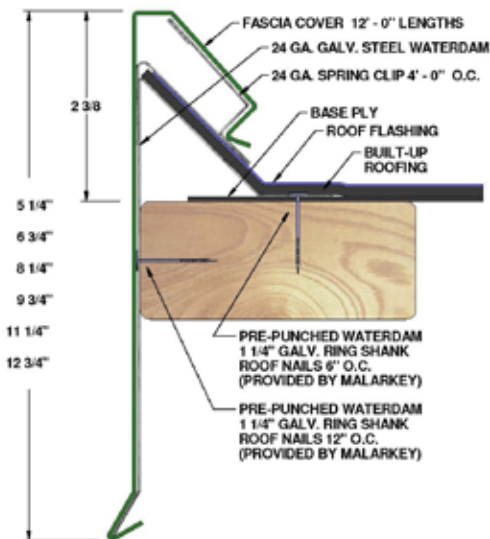

ENDURA™ EDGE RP RECYCLED CONTENT

	RECYCLED CONTENT	POST INDUSTRIAL	POST CONSUMER
GALVANIZED STEEL	25% - 50%	50% - 78%	22% - 50%
3003 ALUMINUM	50%	55%	45%
5005 ALUMINUM	20% - 25%	60%	40%

TECHNICAL ASSISTANCE:

Malarkey has technical services assistance available.
Contact Malarkey for details:
Call weekdays 7:00 am to 5:00 pm PST,
at 800.545.1191 or 503.283.1191.
technicalinquiries@malarkeyroofing.com

CORPORATE OFFICE:

3131 N. Columbia Blvd.
Portland, OR 97217-7472
P.O. Box 17217
Portland, OR 97217-0217

Telephone: 503.283.1191
or 800.545.1191
Fax: 503.289.7644

Effective 9/15
Supersedes all previously published data
Check for most current version
on our website.