




TECHNICAL DETAILS

WEIGHT/ROLL 86 lbs. 39.9 kg	WEIGHT/SQUARE 43 lbs. 19.5 kg
WIDTH 39 ³ / ₈ " 1 m	LENGTH 65' 8" 20 m
THICKNESS 80 mils nominal	COVERAGE 2 square
ROLLS/PALLET 20 from OR/CA/OK	


TEST COMPLIANCE

ASTM D6509 Type I	ASTM E108 Class A Fire Rating
	
	

FEATURES & BENEFITS

- Ideal for limited access installations
- Versatile use as a base or ply sheet
- Besides new roofs, applications also include re-roofs, re-covers and BUR repair

APP-MODIFIED TORCH GRADE BASE SHEET

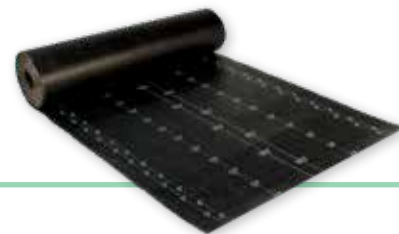

PRODUCT USE

The 159 OmniTGTM Base roofing membrane is suitable for use as a smooth surface base/inter-ply sheet and applied using heat welding or mechanical attachment. OmniTGTM Base is a high-performance membrane that may be used over various combustible and non-combustible decks, but requires an approved cap sheet membrane. Applications include re-roofing, re-cover and BUR repair. Please consult Malarkey Technical Services Department for approval of roof systems.

COMPOSITION & MATERIALS

OmniTGTM Base is an APP-modified bitumen membrane manufactured on a fiberglass mat reinforcement, impregnated and coated with a polymerized asphaltic compound for waterproofing and weatherability, and surfaced with poly film (pictured) or a mineral release material.

APPLICATION/INSTALLATION

OmniTGTM Base shall be applied as specified. Roof decks should be sound, dry, smooth, meet necessary local requirements, and provide positive drainage. Do not apply wet membrane sheets. See Malarkey's Specification Manual for installation instructions, or contact our Technical Services Department for details.

STORAGE & HANDLING

For best results, Malarkey recommends OmniTGTM Base be protected from the weather and stored on end in a cool, dry, well-ventilated area until applied.

WARRANTY

Malarkey Roofing Products® offers various warranties to meet specific requirements. The warranty package for OmniTGTM Base includes 5, 10, 15, and 20-year limited and unlimited coverage. Contact your roofer, local distribution center or Malarkey for full details. See below for TECHNICAL ASSISTANCE contact information.

OmniTGTM Base and other Malarkey products are available throughout North America and Pacific Rim countries.

Visit WWW.MALARKEYROOFING.COM for additional product information and availability.

NOTE: Malarkey Roofing Products® inventory SKU number for this product: 159 OmniTGTM Base

TECHNICAL ASSISTANCE:


Malarkey has technical services assistance available. Contact Malarkey for details: Call weekdays 7:00 am to 5:00 pm PST, at 800.545.1191 or 503.283.1191. technicalinquiries@malarkeyroofing.com

CORPORATE OFFICE:

3131 N. Columbia Blvd. Telephone: 503.283.1191
Portland, OR 97217-7472 or 800.545.1191
P.O. Box 17217 Fax: 503.289.7644
Portland, OR 97217-0217

Effective 10/18
Supersedes all previously published data
Check for most current version on our website.

**APP-MODIFIED
TORCH GRADE
BASE SHEET**

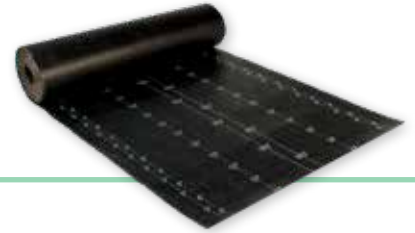

SPECIFICATIONS	PROPERTIES
Low Temperature Flexibility, °F (°C) before and after conditioning, max	32°F (0°C)
Peak Load @ 73.4°F ± 3.6°F (23°C ± 2°C) before and after conditioning, max	MD and XMD: 50 lbf/in. (8.8 kN/m)
Elongation @ 73.4°F ± 3.6°F (23°C ± 2°C) MD & XMD, before and after heat conditioning at peak load	MD and XMD: 2%
Typical properties, 2.0 square roll: Test Methods - ASTM D5147 and ASTM D6509 Type I Listed with UL - Classified Class 'A', 'B' and 'C' in Fire Ratings (UL 790).	

Effective 10/18
Supersedes all previously published data
Check for most current version
on our website.

TECHNICAL ASSISTANCE:
Malarkey has technical services assistance available.
Contact Malarkey for details:
Call weekdays 7:00 am to 5:00 pm PST,
at 800.545.1191 or 503.283.1191.
technicalinquiries@malarkeyroofing.com

CORPORATE OFFICE:
3131 N. Columbia Blvd. Telephone: 503.283.1191
Portland, OR 97217-7472 or 800.545.1191
P.O. Box 17217 Fax: 503.289.7644
Portland, OR 97217-0217