



Self-Adhering, NEX™ Polymer Modified Underlayment for Ice and Water Protection




400 Arctic Seal®

- Approx. Wt./Roll: 30 lbs. (13.6 kg)
- Coverage: 1 square
- Width: 36" (0.91 m)
- Length: 33' 4" (10.2 m)
- Thickness: 55 mils (nominal)
- Rolls/Pallet: 39 from OR; 42 from OK
- ASTM D1970

401 Arctic Seal®

- Approx. Wt./Roll: 60 lbs. (27.2 kg)
- Coverage: 1.95 square
- Width: 36" (0.91 m)
- Length: 65' (19.8 m)
- Thickness: 55 mils (nominal)
- Rolls/Pallet: 25 from OR/CA; 28 from OK
- ASTM D1970
- FM Approved

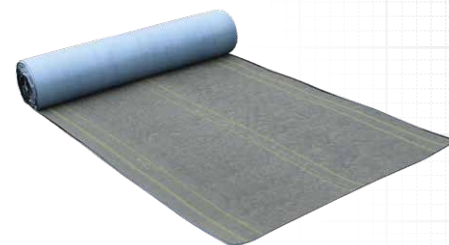

Split-Release Film Allows Easy Application


Guards Against Ice Damming and Wind-Driven Rain

Modular; Serves Dual Role as a Flashing Membrane

Protects Entire Decks, Roof Perimeters and Valleys

Increased Walkability, Even in High Temperatures

Passed ASTM D5147 Compound Stability Testing up to 225°F (107°C) Without Failure



QUALITY DESIGN

Manufactured on a durable fiberglass mat, coated in SBS asphalt, and surfaced with a sand release agent. Underside has aggressive adhesive protected with split-release film.




NEX™ POLYMER MODIFIED ASPHALT

Asphalt technology increases flexibility, cold weather application, and tear strength.



LOW SLOPE ROOFING APPLICATION

Installed with OmniSeal™ Cap as part of the DuoStik™ low slope system. Waterproof protection.



WARRANTIES

- 10-year product warranty
- Optional *Accessory Warranty* when part of a greater roof system
- Eligible for *Concrete and Clay Tile Underlayment Warranty* for up to 20 years

