


SECURE START™ PLUS

Lightweight Synthetic Underlayment

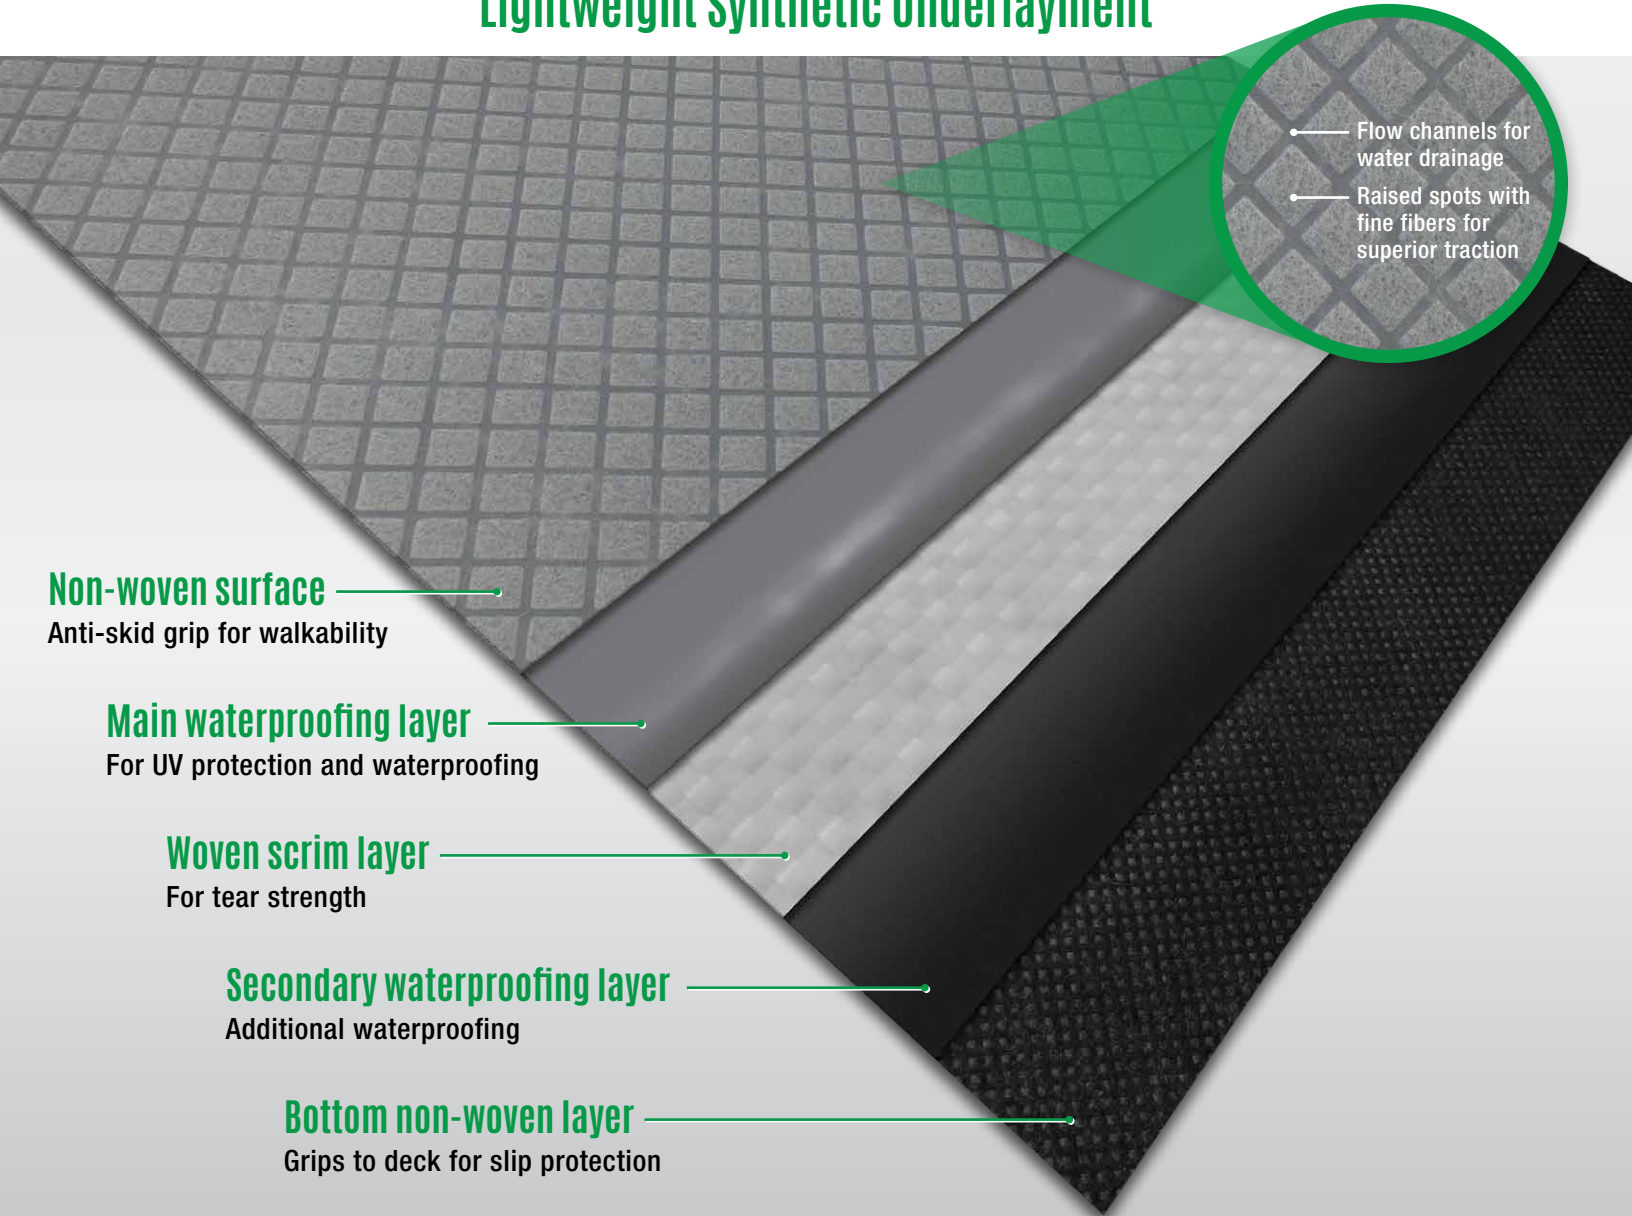

Non-woven surface

Anti-skid grip for walkability

Main waterproofing layer

For UV protection and waterproofing

Woven scrim layer

For tear strength

Secondary waterproofing layer

Additional waterproofing

Bottom non-woven layer

Grips to deck for slip protection

- Flow channels for water drainage
- Raised spots with fine fibers for superior traction

Layers of Engineered Performance

The SecureStart™ Plus underlayment is engineered with five layers of secured redundancy and improved durability. The woven scrim layer adds strength to prevent wrinkling and tears, while the advanced, non-slip backside grabs the deck for easier installation and improved walkability. The new SecureStart™ Plus underlayment is lighter weight, and installs 25% faster than traditional 36" felts and underlayments.

SecureStart™ Plus

- Lightweight Steep Slope Synthetic Underlayment
- ICC-ES AC188, ASTM D226, ASTM D4869, CAN/CSA A123.3, CCRR-1082, FBC FL23186
- ASTM E108 Class A Fire Rating when installed with a Fire Rated Roof Covering

Approx. Wt./Roll: 30 lbs. (13.6 kg)
Total Area/Roll: 10 squares
Width: 48" (1.2 m)
Length: 250' (76.2 m)
Rolls/Pallet: 36 from OR/CA/OK