


# SECURE START® PERMEABLE

SYNTHETIC, BREATHABLE ROOFING UNDERLAYMENT

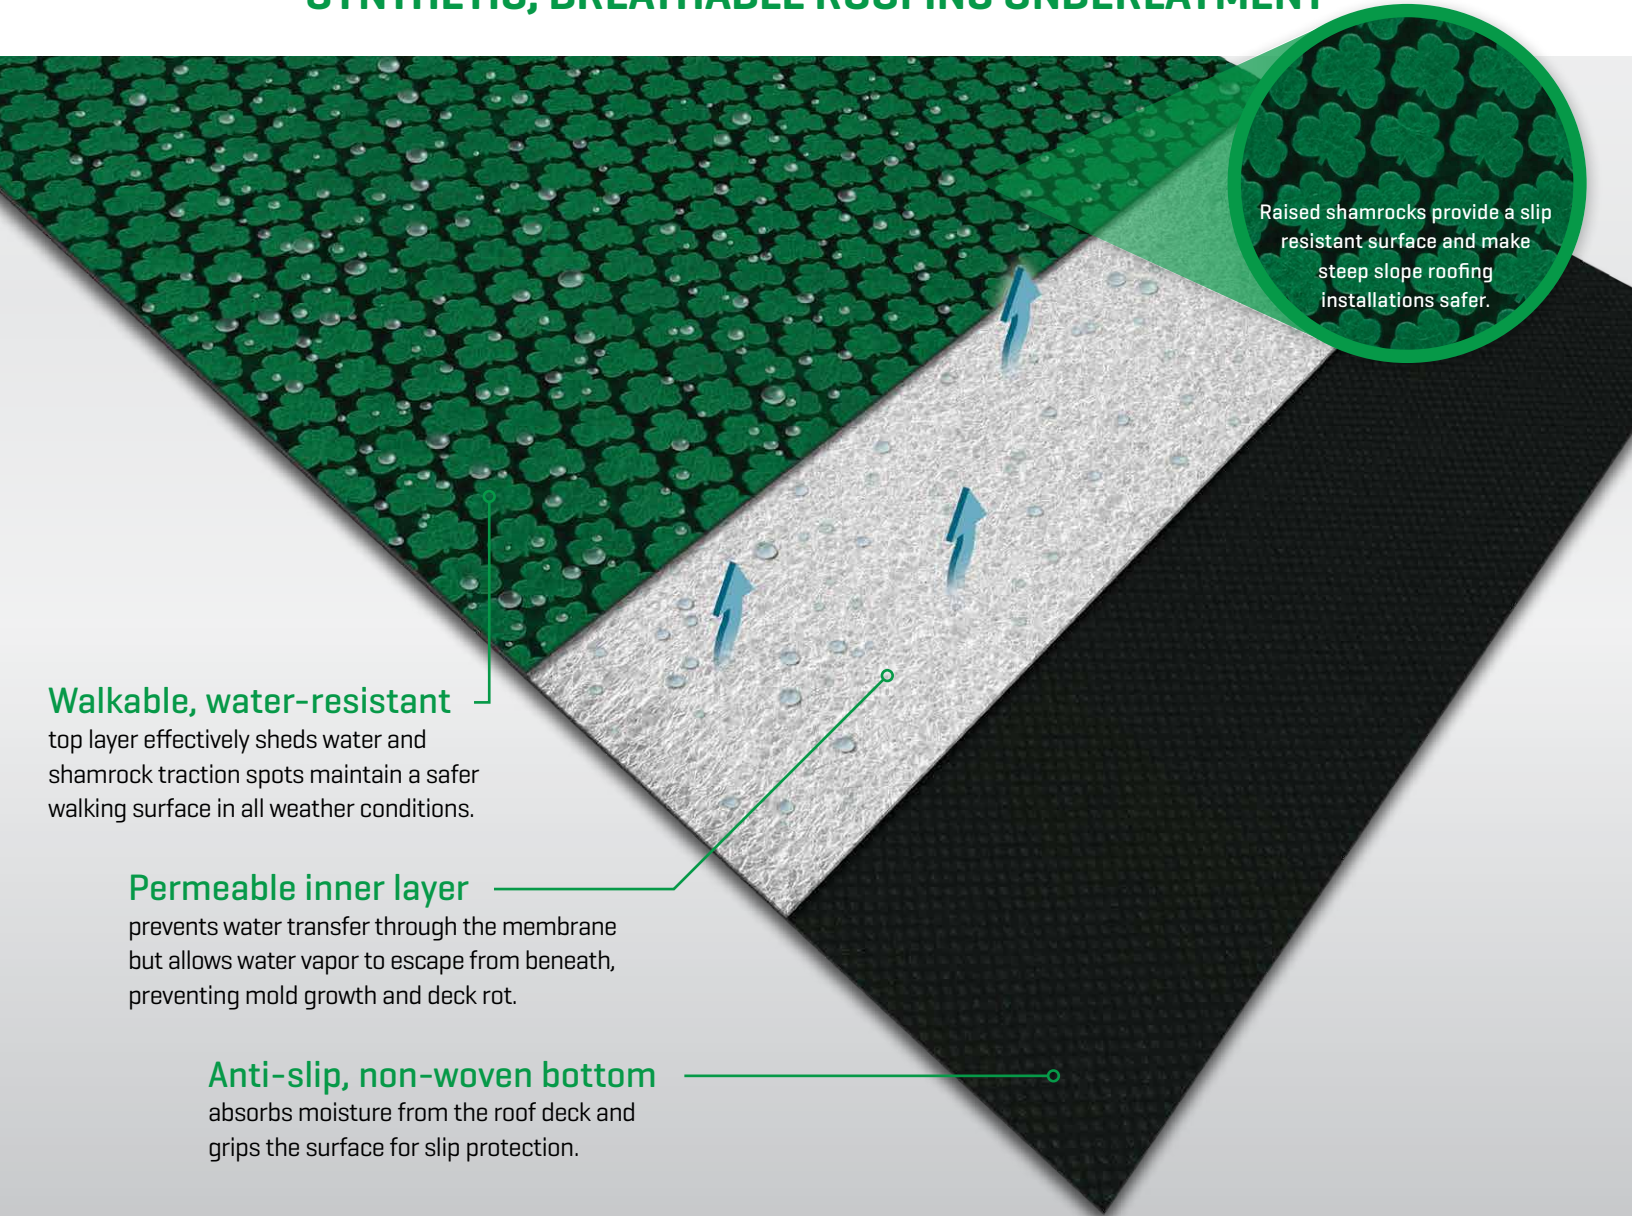

Raised shamrocks provide a slip resistant surface and make steep slope roofing installations safer.

## Walkable, water-resistant

top layer effectively sheds water and shamrock traction spots maintain a safer walking surface in all weather conditions.

## Permeable inner layer

prevents water transfer through the membrane but allows water vapor to escape from beneath, preventing mold growth and deck rot.

## Anti-slip, non-woven bottom

absorbs moisture from the roof deck and grips the surface for slip protection.

## Layers of Engineered Performance

Secure Start® Permeable synthetic underlayment is engineered for the ultimate defense from roof deck rot. Patented permeable technology removes moisture from a wet roof deck or poorly ventilated roof system, preventing premature roof deck decay and mold growth. The new Secure Start® Permeable is an ultra thick but lightweight, permeable underlayment that installs 25% faster than #30 traditional felt.

## Secure Start® Permeable

- High strength, breathable, synthetic steep slope underlayment
  - Works under shingles, shakes, metal, and tile
  - ICC-ES AC188, ASTM D226 Type I & II, ASTM D4869, CAN/CSA A123.3, CCRR-1082, FBC FL23186
  - ASTM E108 Class A Fire Rating when installed with a Fire Rated Roof Covering
- Approx. Wt./Roll: 20 lbs. [9 kg]  
Width: 48" [1.2 m]  
Length: 125' [38.1 m]  
Total Area/Roll: 5 squares  
Rolls/Pallet: 36 from OR/CA/OK  
Permeability Rating: 30 perms